



Konica Minolta bizhub C658/C558/C458 Specification & Installation Guide



KONICA MINOLTA

07/13/2016

bizhub C658/C558/C458 Specifications

Type	Full Color Printer/Copier/Scanner
Document holder	Stationary (mirror scanning)
Photoconductor	OPC
Luminous source	LED light-source illumination
Copying system	Laser electrostatic copy method
Developing system	Dry-2 component developing method
Fusing system	Belt Fusing
Resolution	Scanning: 600 x 600 dpi Printing: 1200 x 1200 dpi
Document holder	Types: sheets, books (2-page spreads), three-dimensional objects Size: Maximum 11" x 17" Weight: 4.5 lb.
Paper	Thin Paper (14 lb. to 15.5 lb.)* Plain Paper (16 lb. to 24 lb.) Thick Paper 1 (24.25 lb. to 32 lb.) Thick Paper 1+ (32.25 lb. to 41.75 lb.) Thick Paper 2 (42 lb. to 55.5 lb.) Thick Paper 3 (55.75 lb. to 68 lb.) Thick Paper 4 (68.25 lb. to 79.75 lb.)** Recycled Paper (16 lb. to 24 lb.) Special Paper (16 lb. to 24 lb.) Letterhead (16 lb. to 24 lb.) Color Paper (16 lb. to 24 lb.) 1-Sided Special Paper (16 lb. to 24 lb.) Banner Paper** (34 lb. to 55.5 lb.) OHP Transparencies**, envelopes**, label sheets**, tabs**, postcards** <small>*Cannot be fed through the bypass tray. **Can only be fed through the bypass tray; Monochrome copying/printing on transparencies is supported. Color copying/printing on transparencies is NOT supported.</small>
Copy sizes	1st Tray: 11" x 17" to 8.5" x 11", 5.5" x 8.5", 8" x 13"* 2nd Tray: 12.25" x 18" to 8.5" x 11", 5.5" x 8.5", 8" x 13"* Bypass Tray: 12" x 18" to 5.5" x 8.5", 12.25" x 18", 4" x 6", 8" x 13"*, Banner Paper <small>*There are six Foolscap sizes: 220 x 330mm (☐), 8.5" x 13.5", 8.5" x 13" (☐), 8.25" x 13 (☐), 8.12" x 13.25" (☐) and 8" x 13" (☐). Any one of these sizes can be selected. For details, please consult with your authorized Konica Minolta Service representative.</small>
Paper tray capacity	1st Tray and 2nd Tray: Thin Paper/Plain Paper/Recycled Paper/Special Paper/Letterhead/Color Paper/1-Sided Special Paper: 500 sheets; Thick Paper 1/1+/2/3: 150 sheets
Paper tray capacity (cont.)	Bypass Tray: Plain Paper/Recycled Paper/Special Paper/Letterhead/Color Paper/1-Sided Special Paper: 150 sheets; Thick Paper 1/1+/2/3/4/OHP Transparencies/Postcards/Tabs: 20 sheets; Envelopes: 10; Banner Paper/Label sheets: 10 sheets

Copy exit tray capacity	Thin Paper: 100 sheets Plain Paper: 250 sheets Thick Paper: 10 sheets Overhead Projection Transparencies*: 1 sheet <small>*Can only be fed through the bypass tray; Monochrome copying/printing on transparencies is supported. Color copying/printing on transparencies is NOT supported.</small>																																																								
Warm-up time	Color and BW less than 25 seconds (at room temperature/73.4° F)																																																								
Image loss width	Leading edge: 0.1875" Trailing edge: 0.125" Rear edge: 0.125" Front edge: 0.125"																																																								
First copy	C658: Color: 4.0 sec. or less B/W: 3.0 sec. or less C558: Color: 4.4 sec. or less B/W: 3.5 sec. or less C458: Color: 5.1 sec. or less B/W: 4.0 sec or less																																																								
Print speed*: (Full Color/B&W) (Simplex/Duplex)	bizhub C658: Thin paper: 45 sheets/min. Plain paper: 65 sheets/min. Thick 1/Thick 1+/Thick 2: 32 sheets/min. Thick 3: 28/32 sheets/min. Thick 4: 27/30 sheets/min. (from Bypass) bizhub C558: Thin paper: 38 sheets/min. Plain paper: 55 sheets/min. Thick 1/Thick 1+/Thick 2/Thick 3: 28 sheets/min. Thick 4: 27 sheets/min. bizhub C458: Thin paper: 31 sheets/min. Plain paper: 45 sheets/min. Thick 1/Thick 1+: 28 sheets/min. Thick 2/Thick 3/Thick 4: 23 sheets/min.																																																								
Print speed (ppm)*:	Color/B&W (single sided/plain paper): <table border="1"> <thead> <tr> <th>Size</th> <th>C658</th> <th>C558</th> <th>C458</th> </tr> </thead> <tbody> <tr> <td>11" x 17"</td> <td>33</td> <td>27</td> <td>22</td> </tr> <tr> <td>8.5" x 14"</td> <td>37</td> <td>31</td> <td>25</td> </tr> <tr> <td>8.5" x 11" ☐</td> <td>65</td> <td>55</td> <td>45</td> </tr> <tr> <td>8.5" x 11" ☐</td> <td>47</td> <td>40</td> <td>33</td> </tr> <tr> <td>5.5" x 8.5" ☐</td> <td>65</td> <td>55</td> <td>45</td> </tr> <tr> <td>8" x 13" ☐</td> <td>37</td> <td>31</td> <td>25</td> </tr> </tbody> </table> Color/B&W (double sided/plain paper): <table border="1"> <thead> <tr> <th>Size</th> <th>C658</th> <th>C558</th> <th>C458</th> </tr> </thead> <tbody> <tr> <td>11" x 17"</td> <td>33</td> <td>27</td> <td>22</td> </tr> <tr> <td>8.5" x 14"</td> <td>37</td> <td>31</td> <td>25</td> </tr> <tr> <td>8.5" x 11" ☐</td> <td>65</td> <td>55</td> <td>45</td> </tr> <tr> <td>8.5" x 11" ☐</td> <td>65</td> <td>37</td> <td>31</td> </tr> <tr> <td>5.5" x 8.5" ☐</td> <td>65</td> <td>55</td> <td>45</td> </tr> <tr> <td>8" x 13" ☐</td> <td>37</td> <td>31</td> <td>25</td> </tr> </tbody> </table> <small>*Using 1st Tray</small>	Size	C658	C558	C458	11" x 17"	33	27	22	8.5" x 14"	37	31	25	8.5" x 11" ☐	65	55	45	8.5" x 11" ☐	47	40	33	5.5" x 8.5" ☐	65	55	45	8" x 13" ☐	37	31	25	Size	C658	C558	C458	11" x 17"	33	27	22	8.5" x 14"	37	31	25	8.5" x 11" ☐	65	55	45	8.5" x 11" ☐	65	37	31	5.5" x 8.5" ☐	65	55	45	8" x 13" ☐	37	31	25
Size	C658	C558	C458																																																						
11" x 17"	33	27	22																																																						
8.5" x 14"	37	31	25																																																						
8.5" x 11" ☐	65	55	45																																																						
8.5" x 11" ☐	47	40	33																																																						
5.5" x 8.5" ☐	65	55	45																																																						
8" x 13" ☐	37	31	25																																																						
Size	C658	C558	C458																																																						
11" x 17"	33	27	22																																																						
8.5" x 14"	37	31	25																																																						
8.5" x 11" ☐	65	55	45																																																						
8.5" x 11" ☐	65	37	31																																																						
5.5" x 8.5" ☐	65	55	45																																																						
8" x 13" ☐	37	31	25																																																						

continued

Konica Minolta bizhub C658/C558/C458

Specification & Installation Guide



bizhub C658/C558/C458 Specifications continued

Magnification ratios	1.0 (full size: 1.00+/-0.5% or less) Enlarge: 121.4%, 129.4%, 154.5%, 200% Reduce: 78.5%, 73.3%, 64.7%, 50.0% Minimal: 93% Stored Zoom Ratios: 3 "Minimal" zoom ratio (90% to 99.9%)
Multiple copies	1 to 9,999 sheets
Density control	Copy Density: Manual Density Adjustment (9 Levels); Background Density: Automatic and Manual Density Adjustments (9 levels)
Power requirements	120V, 16 A, 60 Hz
Power consumption	0.50 kW or less
TEC Value	C658: 4.0 kWh C558: 3.2 kWh C458: 2.5 kWh
Dimensions (with control panel)	24.2" (W) x 27" (D) x 37.8" (H)
Space requirements*	36.9" (W) x 49.1" (D) x 37.8" (H)
Memory (available hard disk space)	4 GB (250 GB HDD)
Weight	Approx. 242.5 lb.

* The indicated space requirements represent the space required to pull out the paper tray and the tray extension of the bypass tray and with the ADF open.

Duty Cycle


Up to **C658:** 220,000/**C558:** 200,000/**C458:** 150,000.

The Maximum Monthly Duty Cycle describes the maximum number of pages a device can output on a monthly basis. This specification is a guideline intended to offer a comparison of durability as it relates to the entire Konica Minolta MFP and printer product line so that the appropriate device can be placed in order to meet customers needs. If you anticipate that the device will run at the maximum monthly volume for extended period of time, we recommend multiple devices or a higher-end device.

Environmental Requirements


Temperature	50° F to 86° F
Humidity	15% to 85%
Noise during operation (B/W/Color)	C658: 75.0 dB/75.0 dB C558: 75.0 dB/75.0 dB C458: 74.7 dB/74.5 dB
Noise during feeder operation (FS-537/FS-536/FS-533)	C658: 73.5dB/72.4dB C558: 73.5dB/72.4dB/72.4dB C458: —dB/70.9dB/70.9dB
Noise during standby	C658: 46.0 dB C558: 46.0 dB C458: 40.5 dB
Ozone emission	Color: 3.0 mg/h B/W: 1.5 mg/h

bizhub C658 Electrical Requirements

Line Options	Dedicated	NEMA Diagram for 5-20R 
Voltage	110 V/120 to 127V 220 to 240V AC	
Amperage	16 A	
Cycles	60 Hz	
NEMA Part No.	5-20R	
Cord Length	7.5 ft.	


Note: The main electrical outlet must be located within 7.5 feet from the right rear corner of the bizhub C658 main unit.

bizhub C558/C458 Electrical Requirements


Line Options	Dedicated	NEMA Diagram for 5-15R 
Voltage	120 V AC	
Amperage	12 A	
Cycles	60 Hz	
NEMA Part No.	5-15R	
Cord Length	6.6 ft.	

Note: The main electrical outlet must be located within 6.6 feet from the right rear corner of the bizhub C558/C458 main unit.


Space Requirements

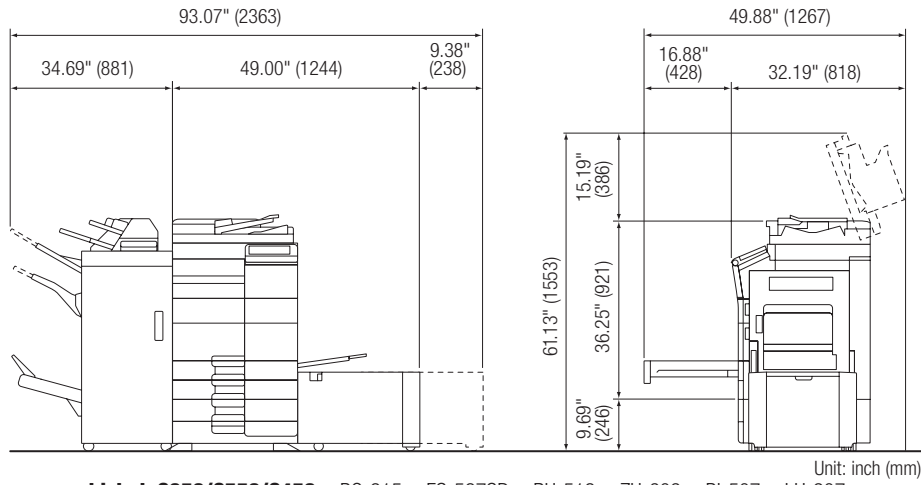

bizhub C658/C558/C458 + PC-215 + FS-537SD + RU-513 + ZU-609 + PI-507 + LU-207

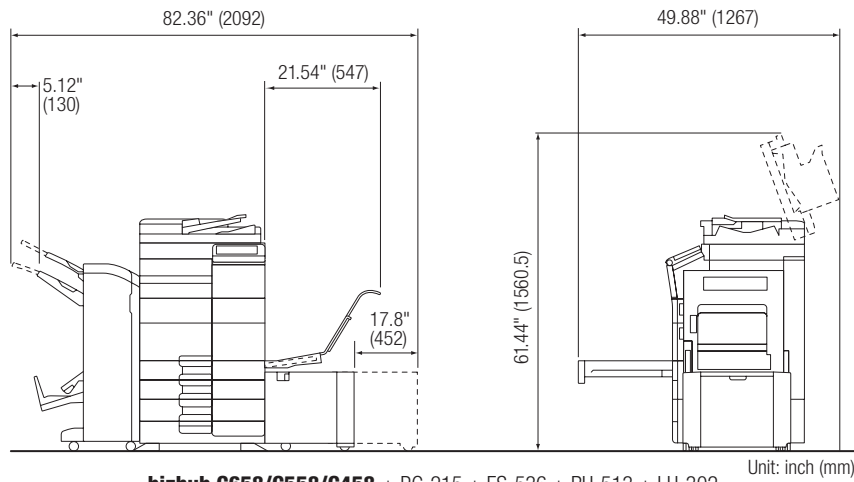

bizhub C658/C558/C458 + PC-215 + FS-536 + RU-513 + LU-302

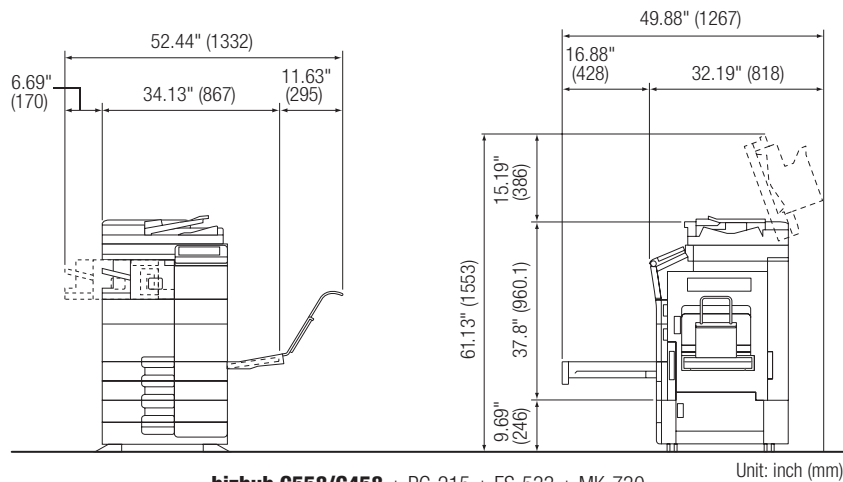

bizhub C558/C458 + PC-215 + FS-533 + MK-730

Component Considerations






Standard Automatic Duplex Unit



Support Paper Type	Thin Paper (14 lb. to 15.5 lb.) Plain Paper (16 lb. to 24 lb.) Thick Paper 1 (24.25 lb. to 32 lb.) Thick Paper 1+ (32.25 to 41.75 lb.) Thick Paper 2 (42 lb. to 55.5 lb.) Thick Paper 3 (55.75 lb. to 68 lb.) Recycled Paper (16 lb. to 24 lb.) Special Paper (16 lb. to 24 lb.) Letterhead (16 lb. to 24 lb.) Color Paper (16 lb. to 24 lb.)
Support Paper Size	12.25" x 18" to 5.5" x 8.5"; 4" x 6"; SRA3; 8" x 13"*; postcards (4" x 6")
Power Requirements	Supplied from main unit


Standard Dual Scanner (Single Pass Duplex Document Feeder)



Type	Single Pass Duplex Document Feeder
Supported Paper Sizes	1-Sided/2-Sided Originals/Mixed Originals: 11" x 17"  to 5.5" x 8.5"  Index Paper: 8.5" x 14"  , 8.5" x 11"  / 
Supported Paper Weights	Single-Sided: 9.25 lb. bond to 55.75 lb. bond Double-Sided: 13.5 lb. bond to 55.75 lb. bond Mixed Original: 13.5 lb. bond to 34 lb. bond 1-Sided Thin Paper (9.25 lb. to 13.063 lb.) 1-Sided Plain Paper (13.25 lb. to 55.75 lb.) 2-Sided Plain Paper (13.25 lb. to 55.75 lb.) Mixed Original Plain Paper (13 lb. to 34 lb.)
Paper Capacity	Max. 300 sheets (21.25 lb.)(Single-Sided/Double-Sided Originals); Index Paper: Max. 70 sheets
Paper Transfer Speed	120 image/min (one-sided @ 300 dpi) (B&W/Color) 240 image/min (two-sided @ 300 dpi) (B&W/Color)
Power Requirements	Supplied from main unit.
Max. Power Consumption	104.5 W or less
Weight	Approximately 32 lb.

Component Considerations


FK-514 Fax Kit



Memory Size	128 GB (Std) (128 GB of the 250GB HDD of the main engine is used for fax memory)
Number of Stored Pages	10,000 Pages (approx. 700 characters per page when 8.5" x 11" document is stored using fine resolution)
Number of Fax Lines	1 Fax Line (no mount kit required); Add second FK-514 Fax Kit for dual line fax capabilities.
Communication	ECM/Super G3
Compatible Lines	PSTN, PBX
Scanning Line Density	Ultra Fine: 600 x 600 dpi Super Fine: 16 dot/mm x 15.4 line/mm, 400 x 400 dpi Fine: 8 dot/mm x 7.7 line/mm, 200 x 200 dpi Normal: 8 dot/mm x 3.85 line/mm
Modem Speed	2.4 kbps-33.6 kbps
Compression	MH/MR/MMR/JBIG
Scanning/(Sending) Paper Size	Original Glass: Max. 11" x 17" ADF: 11" x 39" (Normal, Fine, Super Fine) 11" x 17" (Ultra Fine, Manual TX)
Recording Paper Size	11" x 17" to 5.5" x 8.5"
Transmission Speed	Less than 2 sec. (44 V.34, 33.6 Kbps, JBIG)
Scan Speed	2 sec. (Letter/Fine Mode)
Number of Abbr. Dial	2000
Number of Program Dial	400
Number of Group Dial	100 (Up to 500 destinations per group)
Sequential Multiple Station Transmission	Max. 600
Transmitting Functions	2-in-1 TX, Mixed Original, F-Code Transmission, Frame Erase Transmission, Sharpness, Header/Footer, Memory Transmission, Quick Memory Transmission, Timer Transmission, Incomplete Transmission Hold, Manual Transmission, Confidential Transmission, Password Transmission, Polling Transmission, Bulletin Function, Relay Transmission, Fax Forwarding Function, Overseas TX, V.34 OFF, ECM OFF
Receiving Functions	Duplex Print (RX), Manual Reception, Confidential Reception, Memory Reception, Polling Reception, Bulletin Function, Fax Forwarding (to any destination stored in the Address Book), TSI Routing (to any destination stored in the Address Book).

Component Considerations continued


FK-515 Fax Kit

















Memory Size	128 GB (Std) (128 GB of the 250GB HDD of the main engine is used for fax memory)
Number of Stored Pages	10,000 Pages (including all Scan/Box/Printer/Fax Documents)
Number of Fax Lines	Add 1st FK-515 for 3rd Fax Line (Optional); Add 2nd FK-515 for 4th Fax Line (Optional); Must add two FK-514 Fax Kits first for single and dual line capabilities before you can add lines 3 and 4. FK-515 requires MK-742 Mount Kit (only one MK-742 Mount Kit required).
Communication	ECM/Super G3
Compatible Lines	PSTN, PBX
Scanning Line Density	Ultra Fine: 600 x 600 dpi Super Fine: 16 dot/mm x 15.4 lines/mm, 400 x 400 dpi Fine: 8 dot/mm x 7.7 lines/mm, 200 x 200 dpi Normal: 8 dot mm x 3.85 lines, 100 x 100 dpi
Modem Speed	2.4kbps-33.6kbps
Compression	MH/MR/MMR/JBIG
Scanning (Sending) Paper Size	Original Glass: Max. 11" x 17" ADF: 11" x 39" (Standard, Fine, Super Fine) 11" x 17" (Standard, Fine, Super Fine)
Recording Paper Size	11" x 17"
Transmission Speed	Less than 3 sec (V.34, JBIG)
Scan Speed	1 sec. (Letter/Fine Mode)
Number of Abbr. Dial	2,000
Number of Program Dial	400
Number of Group Dial	100 (Up to 500 destinations per group)
Sequential Multiple Station Transmission	Max. 600 605 (500 Abbreviated Dials + 100 Manual Dials + 5 Manual Email Addresses)
Transmitting Functions	Mixed Original, F-Code Transmission, Frame Erase Transmission, Sharpness, Header/Footer, Memory Transmission, Quick Memory Transmission, Timer Transmission, Incomplete Transmission Hold, Manual Transmission, Confidential Transmission, Password Transmission, Polling Transmission, Bulletin Transmission, Fax Forwarding Function, Overseas TX, V.34 OFF, ECM OFF
Receiving Functions	Duplex Print (RX), Manual Reception, Confidential Reception, Memory Reception, Polling RX, TSI Routing (to any destination stored in the Address Book), Fax Forwarding

Component Considerations

FS-537 Staple Finisher (100 sheets)



Type	Staple Finisher															
Supported Paper Types	<p>Output Tray 1 and Output Tray 2: First Tray: 200 sheets/Second Tray: 3000 sheets (14 lb. to 24 lb.) 1st Tray: Thin Paper: 200 sheets (14 lb. to 15 lb.) Plain Paper: 200 sheets (16 lb. to 24 lb.) Recycled Paper: 200 sheets (16 lb. to 24 lb.) Thick Paper (24.25 lb. to 79.75 lb.) 20 sheets OHP Transparency, Postcard, Envelope, Labels, Letterhead, Tabs: 20 sheets 2nd Tray - Group/Sort Mode: 3,000 sheets (8.5" x 11" or less); 1,500 sheets (8.5" x 14: or more); 500 sheets (5.5" x 8.5" or more) Thin Paper: 3000 sheets (14 lb. to 15 lb., 8.5" x 11" or less) Plain Paper: 3000 sheets (16 lb. to 24 lb., 8.5" x 11" or less) Recycled Paper: 3000 sheets (15 lb. to 24 lb., 8.5" x 11" or less) Thick Paper: 20 sheets (24.188 lb. to 79.75 lb.) OHP Transparency, Postcard, Envelope, Labels, Letterhead, Tabs: 20 sheets 2nd Tray - Offset Group/Offset Sort Mode: 3,000 s (8.5" x 11"); 1,500 sheets (8.5" x 14"); 500 sheets (B5 or less) Plain Paper (14 lb. to 24 lb.) Recycled Paper (14 lb. to 24 lb.) Thick Paper (24.25 lb. to 79.75 lb.) 20 sheets Staple: Thin Paper (14 lb. to 15 lb.) Plain Paper (16 lb. to 24 lb.) Recycled Paper (15 lb. to 24 lb.)</p>															
	8.5" x 11", A4 or less	<table border="1"> <tr><td>2 to 9 sheets</td><td>200 Copies</td></tr> <tr><td>10 to 20 sheets</td><td>50 Copies</td></tr> <tr><td>21 to 30 sheets</td><td>30 Copies</td></tr> <tr><td>31 to 40 sheets</td><td>25 Copies</td></tr> <tr><td>41 to 50 sheets</td><td>20 Copies</td></tr> <tr><td>51 to 60 sheets</td><td>15 Copies</td></tr> <tr><td>61 to 100 sheets</td><td>10 copies</td></tr> </table>	2 to 9 sheets	200 Copies	10 to 20 sheets	50 Copies	21 to 30 sheets	30 Copies	31 to 40 sheets	25 Copies	41 to 50 sheets	20 Copies	51 to 60 sheets	15 Copies	61 to 100 sheets	10 copies
2 to 9 sheets	200 Copies															
10 to 20 sheets	50 Copies															
21 to 30 sheets	30 Copies															
31 to 40 sheets	25 Copies															
41 to 50 sheets	20 Copies															
51 to 60 sheets	15 Copies															
61 to 100 sheets	10 copies															
	8.5" x 14", B4 or more	<table border="1"> <tr><td>2 to 9 sheets</td><td>100 Copies</td></tr> <tr><td>10 to 20 sheets</td><td>50 Copies</td></tr> <tr><td>21 to 30 sheets</td><td>30 Copies</td></tr> <tr><td>31 to 40 sheets</td><td>25 Copies</td></tr> <tr><td>41 to 50 sheets</td><td>20 Copies</td></tr> <tr><td>51 to 60 sheets</td><td>15 Copies</td></tr> <tr><td>61 to 100 sheets</td><td>10 Copies</td></tr> </table>	2 to 9 sheets	100 Copies	10 to 20 sheets	50 Copies	21 to 30 sheets	30 Copies	31 to 40 sheets	25 Copies	41 to 50 sheets	20 Copies	51 to 60 sheets	15 Copies	61 to 100 sheets	10 Copies
2 to 9 sheets	100 Copies															
10 to 20 sheets	50 Copies															
21 to 30 sheets	30 Copies															
31 to 40 sheets	25 Copies															
41 to 50 sheets	20 Copies															
51 to 60 sheets	15 Copies															
61 to 100 sheets	10 Copies															
Supported Paper Sizes	<p>Output Tray 1: 12.25" x 18" , 11" x 17"  to 5.5" x 8.5", 4" x 6", SRA3  Width: 3.5" to 12.60"; Length: 5.5" to 47.25" Output Tray 2: 12.25" x 18", 11" x 17"  to 7.25" to 10.5" / , SRA3  Width: 5.12" to 12.60"; Length: 5.50" to 18" <small>¹ 12.25" x 18" is 304.8 x 457.2 mm that is one-size larger than A3 ² There are six types of foolscaps: 8.5" x 13.5" , 220 x 330 mm , 8.5" x 13" , 8.25" x 13" , 8.125" x 13.25" and 8" x 13".</small> Any one of these sizes is selectable. For details, contact your service representative. Staple Settings: 11" x 17"  to 7.25" to 10.5" / </p>															

Konica Minolta bizhub C658/C558/C458

Specification & Installation Guide



Component Considerations continued

FS-537 Staple Finisher continued



Mode	Non-Sort/Sort/Group/Sort Staple/Group Staple/Sort Punch/Group Punch/Sort Staple Punch/Booklet/Center Fold/Tri-Fold, Offset Output, Staple Output and Punch Output supported via Tray 2 only. (Note: for Booklet Output, Center Fold Output and Tri-Fold Output, use the FS-537SD.)
Stacking Capacity	<p>Output Tray 1: Plain Paper (21.25 lb.) 200 sheets (8.5" x 11" / , 7.25" x 10.5" / ; 20 sheets (12" x 18" , 8.5" x 14" , 8" x 13") Index cards, wide paper and non-standard-size paper: 20 sheets Thick Paper, Transparency, Postcard (4" x 6"), Envelope, Label sheets, Letterhead, Index paper (24 lb. to 79.5 lb.): 20 sheets.</p> <p>Output Tray 2: Plain Paper (21.25 lb.): 3,000 sheets (8.5" x 11" /) Thick Paper (24 lb. to 79.75 lb.): 20 sheets.</p> <p>¹ 12" x 18" is 304.8 x 457.2 mm that is one-size larger than A3. ² There are six types of foolscaps: 8.5" x 13.5" , 220 x 330 mm , 8.5" x 13" , 8.25" x 13" , 8.125" x 13.25" and 8" x 13". Any one of these sizes is selectable. For details, contact your service representative.</p>
Staple Mode	Thick Mode (24.188 lb. to 79.75 lb.): 2 sheets (Cover Mode) Staple: Plain Paper (17 to 21.25 lb.): 100 sheets; Center Staple and Fold: Plain Paper (17 to 21.25 lb.): 20 sheets; (21.25 to 24 lb.): 16 sheets; Corner Front/Back, Center 2-Point, Booklet: Maximum number of Stapled sheets: 100 sheets Thin Paper (14 lb. to 15.688 lb.) Plain Paper (16 lb. to 24 lb.) Recycled Paper (16 lb. to 24 lb.)
Staple Capacity	2 to 50 sheets
Available Options	PK-523 Punch Kit (2/3-Hole Punch), JS-602 Job Separator Tray (3rd Output Tray), PI-507 Post Inserter, ZU-609 Z-Fold Unit
Power Requirements	Supplied from Main Unit
Max. Power Consumption	140 W or less (when all applicable options are installed)
Dimensions WxDxH	24.5" (29.6") x 27.2" x 40.6" Numbers in parentheses () indicate the values applied when the tray is pulled output.
Weight Approx.	Approx. 104 lb.
Consumables	MS-10A Staples (5,000 Staples x 3) for FS-537

JS-602 Job Separator (3rd Output Tray for FS-537)



Applicable	FS-537/ FS-537SD
Type	Output Tray 3
Feeding function	Group, Sort
Paper Type	Plain Paper (16 lb. bond to 24 lb. bond)
Paper Size	11" x 17" to 5.5" x 8.5"
Paper Capacity	Plain Paper (21.25 lb. bond): 8.5" x 11" : 100 sheets Other than 8.5" x 11" : 50 sheets
Dimensions	Width 13.44" x Depth 21.13" x Height 5.88"
Weight	Approx. 3.88 lb.

NOTE: The JS-602 functions as a third output tray on the FS-537. When this tray is added, users can sort print, copy and fax output on three different trays.


Konica Minolta bizhub C658/C558/C458

Specification & Installation Guide



Component Considerations

FS-537SD Staple Finisher (A combination of FS-537 (see specs listed above) and integrated saddle stitcher unit)



Supported Paper Weights	Thin/Plain Paper (14 lb. to 24 lb.) 20 or 19 Sheets + Thick (55.5 lb.) 1 Sheet
Supported Paper Types	Center Staple: Plain Paper (14 lb. to 24 lb.) Half-Fold or Tri-Fold: Plain Paper (14 to 24 lb.)
Supported Paper Sizes	Center Staple & Fold, Half-Fold: 12.25" x 18"L, 11" x 17"L, 8.5" x 14"L, Letter L Tri-Fold: Letter L
Number of Sheets that can be stacked into Output Tray 2	2,500 Sheets (Plain Paper, 20 lb., 8.5" x 11")
Max. Number of Sheets that can be Center-Stapled	20 Sheets Plain Paper (14 lb. to 24 lb.) 19 Sheets Plain Paper (14 lb. to 24 lb.) + 1 Sheet Thick (55.5 lb.)
Max. Number of Folded Sheets	Half-Fold: 5 Sheets Tri-Fold: 3 Sheets
Number of Sheets that can be loaded into the Folding Output Tray	Plain Paper 21.25 lb. Center Folding When the length of the paper is 13" or more: 1 to 5 sheets stapled 35 sets 6 to 10 sheets stapled 30 sets 11 to 20 sheets stapled 15 sets When length of paper is 13" or less: 1 to 5 sheets stapled 35 sets 6 to 10 sheets stapled 25 sets 11 to 20 sheets stapled 15 sets Half-Fold When the length of the paper is 13" or more: 1 to 5 sheets folded 35 sets When the length of paper is 13" or less: 1 to 5 sheets folded 35 sets Tri Fold 1 sheet folded 50 sets 2 sheets folded 40 sets 3 sheets folded 30 sets
Dimensions WxDxH	25.0" (30.6") x 27.2" x 40.6" (number in parentheses indicate dimensions with tray extended)
Weight	161.0 lb.
Consumables	SK-602 Staples (5,000 x 3 Pkg/Case) for FS-537SD

Component Considerations continued

PK-523 Punch Kit (For FS-537)



Applicable	FS-537/FS-537SD
Number of Holes	2 or 3 holes
Supported Paper Weights	Thin Paper (14 lb. to 15 lb.), Plain Paper (16 lb. to 24 lb.), Thick Paper (24.25 lb. to 79.75 lb.)
Supported Paper Sizes	2-Hole Punch Setting: 11" x 17" to 5.5" x 8.5", 8" x 13" 3-Hole Punch Setting: 11" x 17" to 8.5" x 11", 7.25" x 10.5"
Power Requirements	Supplied from Finisher FS-537
Dimensions WxDxH	5.8" x 25.2" x 9.2"
Weight Approx.	Approx. 9.9 lbs.

PI-507 Post Inserter (For FS-537)



Applicable	FS-537/FS-537SD
Type	Post Inserter
Configuration	2 trays (upper and lower)
Cover Paper Type	Plain Paper (16 lb. bond to 24 lb. bond), Thick 24.25 lb. to 55.5 lb.
Cover Paper Size	Upper Tray 8.5" x 11" □/□, 7.25" x 10.5" □/□, 5.5" x 8.5" □ Width: 7.19" to 12.25"; Length: 5.5" to 11.69" Lower Tray 12" x 18" □, 11" x 17" □, 8.5" x 14" □, 8.5" x 11" □/□, 7.25" x 10.5" □/□, 5.5" x 8.5" □ Width: 7.19" to 12.25"; Length: 5.5" to 11.69"
Paper Capacity	Plain Paper (21.25 lb.): 200 sheets for each tray
Power Requirements	Supplied from Finisher FS-537
Dimensions	Width 20.2" x Depth 25.0" x 8.7"
Weight	Approx. 27.6 lb.

ZU-609 Z-Folding Unit (For FS-537)












Applicable	FS-537/FS-537SD
Type	Z-Fold Unit
Number of Punch Holes	2 holes, 3 holes
Paper Type when Hole punching is Selected	Plain Paper (15 lb. bond to 24 lb. bond)
Paper Size when Hole Punching is Selected	11" x 17" □ – 5.5" x 8.5" □/□
Fold Type	Z-Fold
Paper Type when Z-Folding is Selected	Plain Paper (16 lb. bond – 24. lb. bond)
Paper Size when Z-Folding is Selected	11" x 17" □, 8.5" x 14" □
Power Requirements	Supplied from finisher FS-537
Dimensions*	Width 4.0" x Depth 19.9" x Height 7.3"
Weight	Approx. 9.9 lb.

* The ZU-609 is installed inside the FS-537/FS-537SD.

Component Considerations

FS-536 Floor Finisher (50 sheets)




Type	Floor Finisher
Output Trays	Output Tray 1, Output Tray 2, Folding Output Tray (Top of RU unit)
Supported Paper Types	<p>Output Tray 1 & Output Tray 2: Thin Paper (14 lb. to 15 lb.), Plain Paper (16 lb. bond to 24 lb. bond), Recycled Paper (16 lb. to 24 lb.), Thick Paper 1/1+/2/3 (24.25 lb. bond to 79.75 lb. bond), OHP Transparencies, Postcards*, Envelopes*, Label sheets*, Letterhead*, Tabs*, Banner Paper*.</p> <p>Staple Settings: Thin Paper (14 lb. to 15 lb.), Plain Paper (16 lb. bond to 23.94 lb. bond), Recycled Paper (16 lb. to 24 lb.), Thick Paper 1 (24.25 lb. bond to 32 lb. bond), Thick Paper 1+ (32.25 lb. to 41.75 lb.), Thick Paper 2 (42 lb. to 55.5 lb.)</p> <p>* Fed into Output Tray 1</p>
Supported Paper Sizes	<p>Output Tray 1: 12.25" x 18", 11" x 17" to 5.5" x 8.5"  , SRA3, banner (up to 47.2" long)</p> <p>Output Tray 2: Group/Sort: 12.25" x 18", 11" x 17", 5.5" to 8.5"   Offset Group/Offset Sort: 12.25" x 18", 11" x 17" to 5.7" to 7.2", SRA3 Width: 7.188" to 12.625"; Length 5.875" to 18" Staple: 11" x 17" to 7.25" x 10.5"   Width: 7.188" to 11.688"; Length 5.875" to 17"</p> <p>Folding Output Tray: 12.25" x 18", 11" x 17" to 5.5" x 8.5"   Width: 3.5" to 12.5"; Length 5.5" to 18"</p>
Mode	Non-Sort, Sort, Group, Sort/Offset, Group/Offset, Sort and Staple
Stacking Capacity	<p>Output Tray 1: Thin Paper (14 lb. to 15.5 lb.), Plain Paper (16 lb. to 24 lb.): 200 sheets. Thick Paper (24.25 to 79.75 lb.), OHP Transparencies, Postcards, Envelopes or Label sheets, Letterheads, Tabs: 20 sheets</p> <p>Output Tray 2 – Group/Sort Mode: Plain Paper (16 lb. to 24 lb.): 3,000 sheets of 8.5" x 11" or smaller, or 1,500 sheets of 8.5" x 14" or larger; or 500 sheets of 5.5" x 8.5" or smaller.</p> <p>Thick Paper (24.25 to 79.75 lb.), OHP Transparencies, Postcards, Envelopes, Labels, Letterheads, Tabs: 20 sheets</p> <p>2nd Tray – Offset Group/Offset Sort: 3,000 sheets (8.5" x 11" or smaller); 1,500 sheets (8.5" x 14" or larger); 500 sheets (5.5" x 8.5" or larger)</p> <p>Thin Paper (14 lb. to 15 lb.) Plain Paper (16 lb. to 24 lb.) Recycled Paper (16 lb. to 24 lb.) Thick Paper (24.25 lb. to 79.75 lb.), OHP Transparencies, Postcard, Envelope, Label sheets, Letterhead, Tabs: 20 sheets</p> <p>Staple Thin Paper (14 lb. to 15 lb.): 50 sheets Plain Paper (16 lb. to 24 lb.): 50 sheets Recycled Paper (16 lb. to 24 lb.): 50 sheets Thick Paper (24.25 lb. to 32 lb.): 30 sheets Thick Paper 1+ (32.25 lb. to 41.75 lb.): 30 sheets Thick Paper 2 (42 lb. to 55.5 lb.): 20 sheets</p> <p>Maximum number of stapled sets of plain paper (letter size): 2–9 sheets: 200 Sets 10–20 sheets: 50 Sets 21–30 sheets: 30 Sets 31–40 sheets: 25 Sets 41–50 sheets: 20 Sets</p> <p>Folding Output Tray: 100 sheets Thin Paper (14 lb. to 15.5 lb.) Plain Paper (16 lb. to 24 lb.) Recycled Paper (16 lb. to 24 lb.) Thick Paper (24.25 lb. to 79.75 lb.): 20 sheets</p>

continued

Component Considerations continued

FS-536 Floor Finisher continued




Staple Mode	Paper Sizes: 8.5" x 11" to 11" x 17"; Corner, 2 Position (Side, Top)
Available Options	PK-520 Punch Kit (2/3-hole Punch)
Power Requirements	Supplied from Main Unit
Max. Power Consumption	Less than 56 W
Dimensions (W x D x H)	20.8" x 25.2" x 40.3" (When tray is pulled out 25.9" (W))
Weight Approx.	79.4 lb.
Consumables	SK-602 Staples (5,000 Staples x 3)



PK-520 Punch Kit (For FS-536)



Applicable	FS-534/FS-536
Number of holes	2 or 3 holes
Supported Paper Weights	Thin Paper (14 lb. to 15 lb.), Plain Paper (15 lb. bond to 24 lb. bond), Recycled Paper (15 lb. to 24 lb.),
Supported Paper Sizes	2-hole Punch Setting: 11" x 17", 8.5" x 14", 8.5" x 11" 3-hole Punch Setting: 11" x 17", 8.5" x 11"
Power Requirements	Supplied from Finisher FS-534/FS-536
Dimensions (W x D x H)	2.375" x 19.375" x 5.563"
Weight Approx.	Approx. 3.9 lb.

FS-536SD* A combination of FS-536 (see specs listed above) and integrated saddle stitch unit.



Number of bins	1 additional tray
Paper types	Thin Paper (14 lb. to 15 lb.), Plain Paper (15 to 24 lb.), Thick Paper 1/1+2 (24.25 to 55.5 lb.)* <small>*Can only be used as a cover page.</small>
Paper sizes	12.25" x 18"  , 11" x 17", 8.5" x 14"  , 8.5" x 11",
Number of sheets that can be stacked into Output Tray 2	2,500 sheets (Plain Paper, 20 lb., 8.5" x 11")
Number of Center Stapled or Half-Folded sheets	Plain Paper (15 to 24 lb.) 1-3 sheets: 20 Sets 4-10 sheets: 10 Sets 11-20 sheets: 5 Sets
Number of Tri-Folded sheets (Letter Only)	1 sheet: 30 Sets 2-3 sheets: 10 Sets
Staple mode	Booklet, 2-point staple
Maximum staple sheet	20 sheets: (19 sheets/14 to 24 lb.)+(1 sheet/13 to 55.5 lb.)
Dimensions (W x D x H)	20.8" x 25.2" x 40.3"
Weight	132.3 lb.
Consumables	SK-602 (5,000 x 3 pkg/case)
Power requirements	Supplied from main unit

*NOTE: The Saddle Stitcher is not available as a separate accessory. Please refer to engine specifications for additional paper size and weight limitations. Installation of the FS-536 requires the relay unit that is appropriate for the engine.

Component Considerations

RU-513 Relay Unit
















Type	Installed into the Main Body
Powered Requirements	Supplied by Main Engine
Dimensions (W x D x H)	18.0" x 21.9" x 6.0"
Weight	Approx. 8.8 lbs.

NOTE: Required for FS-537/FS-537SD and FS-536/FS-536SD.

FS-533 Inner Finisher* (Staple Function only) (50 sheets)



Type	Inner Staple Finisher
Output Trays	Output Tray 1
Support Paper Types	<p>Group/Sort: Thin Paper (14 lb. to 15 lb.), Plain Paper (16 lb. bond to 24 lb. bond), Recycled Paper (16 lb. to 24 lb.), Thick Paper (24.25 lb. bond to 79.75 lb. bond), OHP Transparencies, Postcards, Envelopes, Label sheets, Letterhead, Tabs, Banner Paper.</p> <p>Offset Group, Offset Sort: Thin Paper (14 lb. to 15 lb.), Plain Paper (16 lb. bond to 24 lb. bond), Recycled Paper (16 lb. to 24 lb.), Thick Paper (24.25 lb. bond to 79.75 lb. bond)</p> <p>Staple Settings: Thin Paper (14 lb. to 15 lb.), Plain Paper (16 lb. bond to 23.94 lb. bond), Recycled Paper (16 lb. to 24 lb.), Thick Paper (24.25 lb. bond to 55.25 lb. bond)</p>
Mode	Group, Sort, Offset Group, Offset Sort, Staple
Support Paper Size	<p>Group/Sort: 12.25" x 18" , 11" x 17"  to 5.5" x 8.5" , 4" x 6" , SRA3 </p> <p>Width: 3.56" to 12.625"; Length: 5.5" to 47.25"</p> <p>Offset Group/Offset Sort: 12.25" x 18" , 11" x 17" , 8.5" x 11" , 7.25" x 10.5" </p> <p>Width: 8.25" to 11.69"; Length: 7.17" x 17"</p> <p>Staple: 11" x 17" , 8.5" x 14" , 8.5" x 11" , 7.25" x 10.5" </p> <p>Width: 8.25" to 11.69"; Length: 7.17" x 17"</p>
Stacking Capacity	<p>Group, Sort, Offset Group, Offset Sort: Thin Paper (14 lb. to 15 lb.), Plain Paper (16 lb. bond to 24 lb. bond), Recycled Paper (16 lb. to 24 lb.): 500 sheets of 8.5" x 11" or smaller; or 250 sheets of 8.5" x 14" or larger Thick Paper (24.25 lb. bond to 79.75 lb. bond), OHP Transparencies, Postcards, Envelopes, Label sheets, Letterhead, Tabs, Banner Paper: 10 sheets</p> <p>Staple: Thin Paper (14 lb. to 15 lb.), Plain Paper (16 lb. bond to 24 lb. bond), Recycled Paper (16 lb. to 24 lb.): 50 sheets of 8.5" x 11" or smaller; or 30 sheets of 8.5" x 14" or larger Thick Paper (24.25 lb. bond to 55.5 lb. bond): 2 sheets</p>
Staple Mode	Corner Front / Back 2-point
Available Options	PK-519 Punch Kit (2-3-hole Punch)
Power Requirements	Supplied from Main Unit
Max. Power Consumption	Less than 40W
Dimensions (W x D x H)	18.6" x 23" x 7.7"
Weight Approx.	26.5 lb.
Consumables	SK-602 Staples (5,000 Staples x 3)

*Available only for the C558/C458.

Component Considerations continued

JS-506 Job Separator Tray



Output tray	Output Tray 1, Output Tray 2
Mode	Group, Sort, Offset Group*, Offset Sort* * Fed into Output Tray 2
Support Paper Types	Group/Sort: Thin Paper (14 lb. to 15.5 lb.), Plain Paper (16 lb. bond to 24 lb. bond), Recycled Paper (16 lb. to 24 lb.), Thick Paper (24.25 lb. bond to 79.75 lb. bond), OHP Transparencies, Postcards*, Envelopes, Label sheets, Letterhead, Tabs*, Banner Paper*. Offset Group, Offset Sort: Thin Paper (14 lb. to 15.5 lb.), Plain Paper (16 lb. bond to 24 lb. bond), Recycled Paper (16 lb. to 24 lb.), Thick Paper (24.25 lb. bond to 79.75 lb. bond) * Fed into Output Tray 2
Support Paper Size	Output Tray 1: 12.25" x 18" □, 11" x 17" L to 5.5" x 8.5" □/□, SRA3 □ Width: 3.56" to 12.625"; Length: 5.5" to 18" Output Tray 2: Group/Sort: 12.25" x 18" □, 11" x 17" □ to 5.5" x 8.5" □/□, 4" x 6" □, SRA3 □ Width: 3.56" to 12.625"; Length: 5.5" to 47.25" Offset Group/Offset Sort: 11" x 17" □, to 7.25" x 10.5" □/□ Width: 7.17" to 12.25"; Length: 5.8" to 18"
Stacking Capacity	Output Tray 1: Thin Paper (14 lb. to 15.5 lb.), Plain Paper (16 lb. bond to 24 lb. bond), Recycled Paper (16 lb. to 24 lb.): 100 sheets Output Tray 2: Group/Sort: Thin Paper (14 lb. to 15.5 lb.), Plain Paper (16 lb. bond to 24 lb. bond), Recycled Paper (16 lb. to 24 lb.): 150 sheets; Thick Paper (24.25 lb. bond to 79.75 lb. bond), Transparency, Postcard, Label sheets: 20 sheets; Envelope: 10 sheets; Banner Paper: 1 sheet Offset Group/Offset Sort: Thin Paper (14 lb. to 15.5 lb.), Plain Paper (16 lb. bond to 24 lb. bond), Recycled Paper (16 lb. to 24 lb.): 150 sheets; Thick Paper (24.25 lb. bond to 79.75 lb. bond): Not specified
Power Requirements	Supplied from Main Unit
Max. Power Consumption	Less than 24W
Dimensions (W x D x H)	19.4" x 18.5" x 8.9"
Weight Approx.	3.3 lb.

*Available only for the C558/C458.

Component Considerations

PC-115 Paper Feed Cabinet



Type	1 x 500 sheet universal drawer + storage
Support Paper Types	Thin Paper (14 lb. to 15.5 lb.), Plain Paper (16 lb. bond to 24 lb. bond), Recycled Paper (16 lb. to 24 lb.), Single Side Only Paper (16 lb. bond to 24 lb. bond), Special Paper (16 lb. bond to 24 lb. bond), Letterhead (16 lb. bond to 24 lb. bond), Colored Paper (16 lb. bond to 24 lb. bond), Thick Paper 1 (24.25 lb. bond to 32 lb. bond), Thick Paper 1+ (32.25 lb. bond to 41.75 lb. bond), Thick Paper 2 (42 lb. bond to 55.5 lb. bond), Thick Paper 3 (55.75 lb. bond to 68 lb. bond)
Support Paper Size	11" x 17" (L) to 8.5" x 11" (L/P), 5.5" x 8.5" (L), 8" x 13" (L)* * There are six Foolscap sizes: 220 x 330mm (☐), 8.5" x 13.5", 8.5" x 13" (☐), 8.25" x 13 (☐), 8.12" x 13.25" (☐) and 8" x 13". Only one of these sizes can be selected. For details, please consult with your authorized Konica Minolta Service representative.
Paper Capacity	Tray 3: Thin paper, Plain paper, Recycled paper, 1-sided special paper, Special paper, Letterhead, Colored paper: 500 sheets, Thick 1, Thick 1+, Thick 2, Thick 3: 150 sheets
Power Requirements	Supplied from Main Unit
Max. Power Consumption	Less than 15W
Dimensions (W x D x H)	24.2" x 25.7" x 11.6"
Weight Approx.	48.5 lb.

PC-215 Paper Feed Cabinet



Type	2 x 500 sheet universal drawers
Support Paper Types	Thin Paper (14 lb. to 15.5 lb.), Plain Paper (16 lb. bond to 24 lb. bond), Recycled Paper (16 lb. to 24 lb.), Single Side Only Paper (16 lb. bond to 24 lb. bond), Special Paper (16 lb. bond to 24 lb. bond), Letterhead (16 lb. bond to 24 lb. bond), Colored Paper (16 lb. bond to 24 lb. bond), Thick Paper 1 (24.25 lb. bond to 32 lb. bond), Thick Paper 1+ (32.25 lb. bond to 41.75 lb. bond), Thick Paper 2 (42 lb. bond to 55.5 lb. bond), Thick Paper 3 (55.75 lb. bond to 68 lb. bond)
Support Paper Size	11" x 17" (L) to 8.5" x 11" (L/P), 5.5" x 8.5" (L), 8" x 13" (L)* * There are six Foolscap sizes: 220 x 330mm (☐), 8.5" x 13.5", 8.5" x 13" (☐), 8.25" x 13 (☐), 8.12" x 13.25" (☐) and 8" x 13" (☐). Any one of these sizes can be selected. For details, please consult with your authorized Konica Minolta Service representative.
Paper Capacity	Tray 3: Thin paper, Plain paper, Recycled paper, 1-sided special paper, Special paper, Letterhead, Colored paper: 500 sheets, Thick 1, Thick 1+, Thick 2, Thick 3: 150 sheets Tray 4: Thin paper, Plain paper, Recycled paper, 1-sided special paper, Special paper, Letterhead, Colored paper: 500 sheets, Thick 1, Thick 1+, Thick 2, Thick 3: 150 sheets
Power Requirements	Supplied from Main Unit
Max. Power Consumption	Less than 15W
Dimensions (W x D x H)	24.2" x 25.7" x 11.6"
Weight Approx.	53 lb.

Konica Minolta bizhub C658/C558/C458

Specification & Installation Guide



Component Considerations continued

PC-415 Paper Feed Cabinet



Type	Large Capacity Cassette
Support Paper Types	Thin Paper (14 lb. to 15.5 lb.), Plain Paper (16 lb. bond to 24 lb. bond), Recycled Paper (16 lb. to 24 lb.), Single Side Only Paper (16 lb. bond to 24 lb. bond), Special Paper (16 lb. bond to 24 lb. bond), Letterhead (16 lb. bond to 24 lb. bond), Colored Paper (16 lb. bond to 24 lb. bond), Thick Paper 1 (24.25 lb. bond to 32 lb. bond), Thick Paper 1+ (32.25 lb. bond to 41.75 lb. bond), Thick Paper 2 (42 lb. bond to 55.5 lb. bond), Thick Paper 3 (55.75 lb. bond to 68 lb. bond)
Support Paper Size	8.5" x 11"
Paper Capacity	Thin paper, Plain paper, Recycled paper, 1-sided special paper, Special paper, Letterhead, Colored paper: 2500 sheets, Thick 1, Thick 1+, Thick 2, Thick 3: 1000 sheets
Power Requirements	Supplied from Main Unit
Max. Power Consumption	Less than 45W
Dimensions (W x D x H)	24.2" x 25.7" x 11.6"
Weight Approx.	50.7 lb.

DK-510 Copy Desk



Type	Storage drawer only
Function	Stores printing materials such as paper or toner. Required when additional paper drawers are not installed, to bring the device to operational height
Dimensions (WxDxH)	24.2" x 25.7" x 11.6"
Weight Approx.	46.3 lb.

OT-506 Output Tray



Number of Bins	Exit Tray (1)
Paper Capacity	250 sheets

NOTE: OT-506 supports banner printing when installed on C658/C558/C458.

Component Considerations

LU-207 Large Capacity Unit



Type	Large capacity cassette
Support Paper Type	Thin Paper (14 lb. to 15 lb.) Plain Paper (16 lb. to 24 lb.) Thick Paper 1 (24.25 lb. to 32 lb.) Thick Paper 1+ (32.25 lb. to 41.75 lb.) Thick Paper 2 (42 lb. to 55.5 lb.) Thick Paper 3 (55.75 lb. to 68 lb.)
Support Paper Size	12" x 18", 11" x 17", 8.5" x 14", 8.5" x 11"*, SRA3
Paper Capacity	Plain Paper: 2,500 sheets (21.25 lb.)/2,750 (17 lb.) Thick 1: 2,000 sheets; Thick 1+: 1,450 sheets; Thick 2: 1,250 sheets; Thick 3: 1,000 sheets
Power Requirements	Supplied from main unit
Max. Power Consumption	22 W or less
Dimensions WxDxH	22.75" x 21.875" x 15.9375"
Weight Approx.	Approx. 55 lb.

* The maximum number of loadable sheets for each paper size is 2,500 sheets for 21.25 lb. paper or 2,750 sheets for 17 lb. paper.

LU-302 Large Capacity Unit



Type	Large Capacity Cassette
Support Paper Type	Thin Paper (14 lb. to 15.688 lb.) Plain Paper (16 lb. bond to 24 lb. bond) Thick Paper 1 (24.25 lb. bond to 32 lb. bond) Thick Paper 1+ (32.25 lb. bond to 41.75 lb. bond) Thick Paper 2 (42 lb. bond to 55.5 lb. bond) Thick Paper 3 (55.75 lb. bond to 68 lb. bond)
Support Paper Size	8.5" x 11", A4
Paper Capacity	Plain Paper: 3,000 sheets Thick Paper 1: 2,500 sheets (24.25 lb. bond to 32 lb. bond) Thick Paper 1+: 1,750 sheets (32.25 lb. bond to 41.75 lb. bond) Thick Paper 2: 1,550 sheets (42 lb. bond to 55.5 lb. bond) Thick Paper 3: 1,300 sheets (55.75 lb. bond to 68 lb. bond)
Power Requirements	Supplied from main unit
Max. Power Consumption	22 W or less
Dimensions WxDxH	14.4" x 20.8" x 15.9"
Weight Approx.	Approx. 40.0 lb.

KP-101 10-Key Pad



Type	10-Key Pad
Function	Provides hard keys for entering numerical values and supports Voice Guidance function available with optional LK-104 v3 i-Option License Kit. Meets Section 508 Accessibility requirements.

Component Considerations continued

AU-102 Biometric Authentication Unit



Biometric Sensor System	Transmission-type optical system
Verification Time	Approx. 1 sec. or less
Interface	USB 2.0
Dimensions WxDxH	Approx. 2.32" x 3.25" x 2.94"
Weight	Approx. 3 oz. (excluding USB cable)
Max. Power Consumption	DC 5 V, 500 mA
System Conditions (during operation)	Ambient temperature: 41° to 95° (F) Humidity: 20% to 80% (No dew condensation)
System Conditions (during non-operation)	Ambient temperature: 32° to 122° (F) Humidity: 20% to 80% (No dew condensation)
MFP Compatibility	bizhub C754, C654, C652DS, C652, C658, C554, C552DS, C552, C458, C454, C452, C364e, C364, C360, C284e, C284, C280, C224e, C224, C220, 754, 654, 552, 423, 363, 283, 223. Please check MyKonicaMinolta.com on a regular basis for compatibility updates.

NOTE: WT-506 Working Table is required for AU-102 Biometric Authentication Unit.

AU-204H Magnetic Stripe Card Reader



Dimensions (WxHxD)	1.28" x 1.23" x 3.94"
Weight	4.5 oz.
Power Supply	Supplied from USB Port
System Conditions (operating mode)	Ambient Temperature: 40° to 158° F Humidity: 10% to 90%
Transmit Frequency	3-60 i.p.s.
Certifications	ISO 7810 and ISO 7811/AAMVA
Card Type Compatibility	All magnetic stripe cards
MFP Compatibility	bizhub C754e, C654e, C554e, C454e, C368, C308, C224e. Please check MyKonicaMinolta.com on a regular basis for compatibility updates.

NOTE: WT-506 Working Table required for AU-204H Magnetic Stripe Card Reader.

AU-205H IC Card Reader



Dimensions (WxHxD)	2.8" x 3.7" x 0.6"
Host Interface	USB 2.0 (also compliant with USB 1.1)
Power Supply	Supplied from USB Port
Card Protocols Low Frequency (125 kHz)	HID PROX, HID India, EM Prox
Card Protocols High Frequency (13.5 MHz)	CCID: MIFARE Classic™ 1K/4K, Ultra Light, Ultra Light C, Plus, MIFARE DESFire™ 0.6, MIFARE DESFire™ EV1, IC Card, iCLASS SE/SR®, MIFARE SE™, DESFire EV1 SE, T=CL, ISO 14443 A with up to 848 kbps transmission rate (depending on card 1), ISO 15693 with up to 26 kbps transmission rate (depending on card) Keyboard Wedge: MIFARE™ Classic 1K/4K, Ultra Light, Ultra Light C, Plus (Security Lvl 1), MIFARE DESFire™ 0.6, MIFARE DESFire™ EV1 (MAC/DES/3DES/3K3DES/AES), IC Card, iCLASS SE/SR®, MIFARE SE™, DESFire EV1 SE

Component Considerations


AU-211P CAC/PIV Solution w/Certificate



Dimensions (WxHxD)	2.75" x 2.75" x 0.39"
Weight	0.13 lbs.
Power Supply	Supplied from USB Port
System Conditions (operating mode)	0° to 122° F
Interface	Full Speed USB (12 Mbps)
Connector Shape	USB A Type Connector
Compatible Card	PKI-C-Card (PIV, CAC)
MFP Compatibility	bizhub C754, C654, C658, C554, C552, C458, C454, C452, C364e, C364, C360, C284e, C284, C280, C224e, C224, C220, 754, 654, 552, 501, 423, 363, 283, 223. Please check MyKonicaMinolta.com on a regular basis for compatibility updates.

NOTE: WT-506 Working Table required. Please contact your local Government Account Manager for additional information.

WT-506 Working Table



Type	External Table
Function	Holds AU-102 Biometric Authentication Unit, AU-201H HID Proximity Card Reader, AU-202H HID iClass Reader, AU-204H Magnetic Stripe Card Reader ¹ or AU-211P CAC/PIV Solution ² ; Can be used as a place holder for originals and/or output.
Dimensions WxDxH	18.30" x 16.33" x 1.5"

¹AU-204H Magnetic Stripe Card Reader requires WT-506.

²AU-211P requires WT-506. Please contact your local Government Account Manager for additional information.

EK-608 USB Host/Local Interface



Type	USB Interface and USB Cable
Function	Required to connect optional External Keyboard (or can use EK-609 when Bluetooth printing is also required) or optional i-Option LK-104 v3 Voice Guidance License kit.

EK-609 USB Host/Local Interface with Bluetooth



Type	USB Interface and USB Cable
Function	Supports Bluetooth Printing. Required to connect optional External Keyboard (or can use EK-608 if Bluetooth printing is not required) or optional i-Option LK-104 v3 Voice Guidance License kit.

MK-742 Mount Kit



Type	Internal Component
Function	Required if you wish to install the FK-515 Fax Kit(s) for Fax Line 3 and Fax Line 4 support. Only one MK-742 Mount Kit required.

MK-735 Mount Kit



Type	Internal Component
Function	Required if you wish to install the AU-205H internally in the device.


Component Considerations continued

IC-416 Fiery Image Controller



Type	Embedded Type
CPU	Intel® Pentium G850 (3M cache, 2.90 GHz Dual-Core)
Memory	2 GB
HDD	500 GB SATA
Continuous Print Speed	Same as Continuous Copy (when using the same original)
Resolution	600 dpi, 1200 dpi
Page Description Language	Adobe PostScript 3 version 3020, PCL6, PDF v1.7
Network/Connectivity	TCP/IP, AppleTalk, Bonjour support, SNMP, Port 9100, IPP, FTP, SMB, WSD, Point and Print, Print via Email (PS/PDF), IPv6 support
Operating System	Linux

VI-510 Interface Kit



Type	Interface Kit
Function	Required interface kit to connect IC-416 Fiery Image Controller to MFP.

LK-102 v3 i-Option License Kit

Type	License Key
Function	Enhanced PDF Encryption (128-bit AES Encryption), PDF/A (1a/1b) and Linearized PDF file support.

Note: The LK-110 supports the same functions as the LK-102 v3, therefore, both license kits cannot be installed on the same device.

LK-104 v3 i-Option License Kit

Type	License Key
Function	Voice Guidance

LK-105 v4 i-Option License Kit

Type	License key
Function	Provides Searchable PDF function

Note: The LK-110 supports the same functions as the LK-105 v4, therefore, both license kits cannot be installed on the same device.

LK-106 i-Option License Kit

Type	License key
Function	Supports Bar Code Font Printing

LK-107 i-Option License Kit

Type	License key
Function	Supports Unicode Font Printing

Component Considerations

LK-108 i-Option License Kit

Type	License key
Function	Supports OCR Font Printing

LK-110 v2 i-Option License Kit

Type	License Key
Function	OOXML format file conversion for docx/xlsx, Fax to searchable PDF, convert box data to compact PDF, direct print e-mail attached file. Combines LK-102 (Encrypted PDF) & LK-105 (Searchable PDF/OCR) functionality.

Note: If you install the LK-110 on a device, you cannot install the LK-102 v3 and/or LK-105 v4 on the same device.

LK-111 i-Option License Kit

Type	License Key
Function	Provides ThinPrint client support.

SC-508 Copy Guard Kit

Type	Embedded Type
Function	Prevents printing of Copy Protected documents.

NOTE: Two SC-508 Copy Guard Kits are required for C658/C558/C458 since these models offer standard Dual Scan Document Feeder (one Copy Guard Kit required for each side scanned).

HD-524 Hard Disk Mirroring

Type	Internal Back Up HDD
Function drive.	Provides real-time synchronized back up of the primary hard disk

UK-501 Multi-feed Detection Kit

Type	Ultra-sonic sensor
Function	Provides rapid detection of multi-feed condition in document feeder.

UK-212 Wireless LAN Upgrade Adapter



Type	WLAN Adapter
Function	Provides wireless secure connection for printing, scanning and Authentication.

Konica Minolta bizhub C658/C558/C458

Specification & Installation Guide



Mixed Original Support

● Possible ✕ Not Possible

Document Size ²	Maximum Document Width ¹					
	11" x 17" landscape	8.5" x 11" portrait	8.5" x 14" landscape	8.5" x 11" landscape	5.5" x 8.5" portrait	5.5" x 8.5" landscape
11" x 17" (☐)	●	●	✕	✕	✕	✕
8.5" x 11" (☐)	●	●	✕	✕	✕	✕
8.5" x 14" (☐)	●	●	●	●	●	✕
8.5" x 11" (☐)	●	●	●	●	●	✕
5.5" x 8.5" (☐)	✕	✕	●	●	●	✕
5.5" x 8.5" (☐)	✕	✕	✕	✕	✕	●

¹ Indicates the width of the widest document size of the mixed originals.

² Indicates the document sizes that can be mixed together based on the maximum document width.

Standard Paper Tray Support

Main Unit - bizhub C658/C558/C458 (Paper Tray 1 and 2)			
Component	Capacity	Size	Weight
Tray 1	500 sheets	11" x 17"	14 lb. bond to 68 lb. bond
Tray 2	500 sheets	12" x 18"	14 lb. bond to 68 lb. bond
Bypass	150 sheets	12" x 18"	16 lb. bond to 79.75 lb. bond

Konica Minolta bizhub C658/C558/C458

Specification & Installation Guide



Print Controller (Standard)

Type	Internal Type			
CPU	1.6 GHz (shared with copier)			
Memory	4 GB (shared with copier) 250 GB HDD (shared with copier)			
Print Speed (ppm)	C658	C558	C458	
	Color:	65	55	45
	BW:	65	55	45
Print Resolution	600 x 600 dpi (1800 equivalent x 600 dpi), 1200 x 1200 dpi			
PDL	PCL 5e/c emulation, PCL6 (XL version 3.0), PS 3 (Version 3016) Emulation, XPS			
Protocol	TCP/IP (IPv4/IPv6), BOOTP, ARP, ICMP, DHCP, DHCPv6, AutoIP, SLP, SNMP, FTP, LPR/LPD, RAW Socket, SMB over TCIP/IP, IPP, HTTP, POP, SMTP, LDAP, NTP, SSL, IPX, AppleTalk, Bonjour, NetBEUI, WebDAV, DPWS, S/MIME, IPsec, DNS, Dynamic DNS, LLMNR, LLTD, SSDP, SOAP			
Support OS	Windows Vista 7/8/8.1, Windows Vista 7/8/8.1 64-bit, Windows Server 2003 R2/Server 2008/ Server 2012/Server 2012 R2 64-bit; Mac OS 9.2/OS X 10.6, 10.7, 10.8, 10.9, 10.10, Intel Edition; Red Hat Enterprise Linux			
Font	PCL Resident Fonts: 80 Roman fonts PS3 Emulation Resident Fonts: 137 Roman Type 1 font			
Interface	Standard Ethernet (10Base-T/100Base-TX/ 1000Base T); Hi-Speed USB 2.0, USB 1.1, USB Host			

Fiery® IC-416 Embedded Image Controller

Processor	Intel Pentium Processor G850 (3M cache, 2.90 GHz, Dual-Core)
Base Operating System	Linux
RAM	2GB
Hard Disk Drive	500 GB
Page Description Language	Adobe PostScript 3 Version 3020, PCL6, PDF v1.7
Fonts	138 Adobe PS fonts
Network Connectivity	TCP/IP, Apple Talk, Bonjour support, SNMP, Port 9100, IPP, FTP, SMB, WSD, Point and Print, Print via Email (PS/PDF), IPV6 support
Utilities	ColorWise® Pro Tools 3.7 Command Workstation™ (for Windows) Command Workstation™ Fiery® Remote Scan 5.4 (TWAIN plug-in) Fiery® Web Tools 3.0
Software	Standard: Fiery® Command Workstation ColorWise Tools Fiery® Secure Erase Fiery® Spot-On Fiery® WebTools Remote Fiery® Scan Fiery® VUE
	Fiery Software and Hardware: Fiery® Productivity Package Fiery® Hot Folders/Virtual Printers Fiery® Auto Trapping Fiery® Impose Fiery® Compose Fiery® Impose/Compose Fiery® Color Profiler Suite Fiery® JobFlow ES-2000 Spectrophotometer

Network Functions

Sending Scanned Data in an Email Message

Scanned data can be sent to a specified Email address. The destination is specified from the touch panel of this machine and the scanned data is sent as an Email attachment.

Sending Scanned Data as Files (FTP)

Scanned data is uploaded to a specified FTP server. The FTP server address, login password, and other information are entered from the touch panel of this machine. The data files uploaded to the FTP server can be downloaded from a computer on the network.

Sending Scanned Data to a Computer on the Network (SMB)

Scanned data can be sent to a shared folder on a specified computer. The name of the destination computer, login password, and other information are entered from the touch panel of this machine.

Saving Scanned Data in Boxes

Scanned data is uploaded to a specified web server. The host name, file path, user name, and password are entered on the touch panel of the machine. The data files uploaded to the server can be downloaded from a computer on the network.

Using the Machine as a Scanner

This machine can best used as a scanner. The scanner can be controlled from a PC connected to the network, and the scanned image can be loaded into an application on the PC to be processed.

Print Drivers

Page Desc. Language	Print Driver	Supported Operating Systems
PCL Driver	Konica Minolta PCL Driver	Windows Vista Windows Server 2008 Windows Server 2008 R2 Windows 8* Windows 8.1* Windows Server 2012* Windows Server 2012 R2* *Supports 32-bit (x86) or 64-bit (x64) Environments
PostScript 3 Emulation	Konica Minolta PostScript 3 Driver	Windows 8* Windows 8.1* Windows Server 2012 Windows Server 2012 R2 Macintosh OS 9.2 PPD file Macintosh OS 10.6, 10.7, 10.8, 10.9, 10.10, PPD + PDE driver Red Hat Enterprise Linux PPD file for printer driver (CUPS v. 1.1.2.2) *Supports 32-bit (x86) or 64-bit (x64) Environments
XPS Driver Emulation	Konica Minolta XPS Driver	Windows Vista Windows Server 2008 Windows Server 2008 R2 Windows 7 Windows 8* Windows 8.1* Windows Server 2012 Windows Server 2012 R2 *Supports 32-bit (x86) or 64-bit (x64) Environments
PostScript PPD Driver	Konica Minolta PostScript PPD Driver	Windows Vista Windows Server 2008 Windows Server 2008 R2 Mac OSX 10.5, 10.6, 10.7, 10.8, 10.9, 10.10
Fax Driver	Konica Minolta	Windows Vista Windows Server 2008 Windows Server 2008 R2 Windows 8* Windows 8.1* Windows Server 2012* Windows Server 2012 R2* *Supports 32-bit (x86) or 64-bit (x64) Environments

Konica Minolta bizhub C658/C558/C458

Specification & Installation Guide



Print Specifications

Item	Specifications
Model	Built-in print system
Power Supply	Common with the main body
CPU	1.6 GHz (shared with copier)
RAM	4 GB
Hard Disk	250 GB (shared with copier)
Interface	Standard Ethernet (10Base-T, 100Base-TX or 1000Base-T) Standard USB 2.0, USB 1.1, USB Host
Frame Type	Ethernet 802.2 Ethernet 802.3 Ethernet II Ethernet SNAP
Supported Protocols	TCP/IP (IPv4/IPv6), BOOTP, ARP, ICMP, DHCP, DHCPv6, AutoIP, SLP, SNMP, FTP, LPR/LPD, RAW Socket, SMB over TCIP/IP, IPP, HTTP, POP, SMTP, LDAP, NTP, SSL, IPX, AppleTalk, Bonjour, NetBEUI, WebDAV, DP-WS, S/MIME, IPsec, DNS, Dynamic DNS, LLMNR, LLTD, SSDP, SOAP
Print Speed Color/BW	C658: 65 ppm (Letter /Simplex and Duplex) C558: 55 ppm (Letter /Simplex and Duplex) C458: 45 ppm (Letter /Simplex and Duplex)
First Print Time	C658: Full Color: 4.7 sec. or less B&W: 3.0 sec. or less C558: Full Color: 4.4 sec. or less B&W: 3.5 sec. or less C458: Full Color: 5.1 sec. or less B&W: 4.0 sec. or less
Operating Environment Conditions	50° to 86° F, 15-85% RH
Resolution	600 x 600 dpi (1800 equivalent x 600 dpi), 1200 x 1200 dpi
Data Processing	600 x 600 dpi (Printing and faxing operations) 400 x 400 dpi (faxing operations) 200 x 200 dpi (faxing operations)
Supported Paper Sizes	Width: 4" to 12.25" Length: 6" to 18"
Printer Fonts	PCL Resident Fonts 80 Roman fonts PS3 Emulation resident Fonts: 137 Roman Type 1 fonts
Compatible Computers	IBM PC or compatible and Macintosh (Power PC or Intel Processor)
Supported Operating Systems	Server Windows Server 2003, Server 2003 R2, Server 2008, Windows Server 2003 x64, Server 2003 R2 x64, Server 2008 x64, Server 2008 R2 x64, Server 2012 x64 Client Windows Vista/7/8/8.1, Windows Vista/7/8/8.1 x64, Windows Server, Server 2008, Server 2008 x64; Mac OS 9.2, OS X 10.6, 10.7, 10.8, 10.9, 10.10, Intel ver. Red Hat Enterprise Linux

Scanning

Type	Full-Color Scanner
Scanning Size	11" x 17" to 5.5" x 8.5
Scanning Resolution	Push Scanning: 600/400/300/200 dpi Pull Scanning: 600/400/300/200/100 dpi
Scanning Speed (Color/B&W)	DF-702: † Duplex: 240 opm (300 x 300 dpi) Simplex: 120 opm (300 x 300 dpi)
Main Function	Scan-to-Email, Scan-to-User Box (HDD), Scan-to-FTP, Scan-to-USB, Scan-to-SMB (Desktop Folder), Scan-to-Me, Scan-to-Home, Scan-to-Scan Server, Network Twain (via Ethernet TCP/IP), Scan-to-WebDAV, WS-Scan
Interface	10Base-T/100Base-TX/1000Base-T
Protocol	TCP/IP (FTP, SMB, SMTP)
Supported OS	Windows Vista, Windows 7, Windows 8, Windows 8.1
Output Format	Single TIFF, Multi TIFF, JPEG, PDF, Compact PDF, XPS, Compact XPS TIFF (MH, MMR), PDF (MH, MMR, JPEG), JPEG, Outline PDF, PPTX, Searchable PDF, PDF/A, Linearized PDF
Driver	TWAIN (Vista/Vista 64-bit/7/7 64-bit/8/8 64-bit), TWAIN Driver, HDD TWAIN Driver
Address Setting	LDAP, Import/Export address from PageScope Web Connection
Authentication	SMTP Authentication, Network User Authentication (Active Directory, Novell, NDS, NTLM ver. 1, NTLM ver. 2, LDAP)

†Text and image scanning speeds vary depending on the type of document.

PageScope Software

Network & Device

Management

PageScope Data Administrator
Driver Packaging Utility
HDD BackUp Utility
Log Management Utility
PageScopeDownloadManager
PageScope NC+ Care Device
Manager (Standard)

User Tools

PageScope Direct Print
PageScope Box Operator
PageScope PrintStatus Notifier
Copy Protection Utility
Print Utility for Unix
PageScope Web Connection

Management Tools

bizhub vCare

Security

Because information assets are critical, a company needs to effectively protect against the many security risks it faces.

- 1) Prevent Leaks of proprietary, confidential or personal information
- 2) Prevent unauthorized use of equipment
- 3) Effective data encryption
- 4) Protect data from being altered, duplicated or deleted
- 5) Prevent unauthorized access to data via the Internet
- 6) Protect against cyber attacks
- 7) Manage log history

Protective Functions:

- HDD Sanitizing — Deletes Graphic Data (when disposing of machine)
- Job Erase — Deletes Graphic Data (after each job)
- Lock Job (when printing confidential documents)
- Protect data by requiring department name and 8-digit password
- Account Track
- HDD Lock
- Prevent Unauthorized Use
- Operation Log with 2,000-event memory
- HDD Encryption
- PDF Scan Encryption
- Protective Functions
- Copy Protection
- Network Authentication
- Single Sign-on Authentication
- SMTP Authentication for Email
- SSL/TSL Compatibility for PS Web Connection, PS Data Administrator and LDAP Server
- Scan Data Encryption (TCP/socket SSL Compatibility)
- LDAP Authentication
- Box Operator Data Encryption
- Verification of Box Data Receipt
- IP Address Filtering
- IP v6
- Encrypted Network Password Printing
- Scan-to-USB Memory with User Authentication
- Print-from-USB Memory with User Authentication
- S/MIME/Encryption
- FIPS 140-2 Compliance
- IEEE 2600.1 Security Ready

Optional Protective Functions:

- HD-524 Hard Disk Mirroring
- SC-508 Copy Guard Kit
- LK-102 v3 Enhanced PDF Scan Encryption
- AU-102 Biometric Authentication Unit
- AU-204H Magnetic Stripe Card Reader
- AU-205H IC Card Reader
- AU-211P CAC/PIV Solution with Certificate

Konica Minolta bizhub C658/C558/C458

Specification & Installation Guide



Paper Considerations

Paper Size Conversion Chart

Paper	Letter	Letter R	Legal	Tabloid	Statement	Statement R
Measurement	8.5" x 11"	11" x 8.5"	8.5" x 14"	11" x 17"	5.5" x 8.5"	8.5" x 5.5"

Paper Weight Conversion Chart

gsm	Bond	Offset	Cover	Tag	Index	Point	Bristol	Caliper	
								inches	mm
60.20	16	40	22	37	33	3.2	27.4	0.0032	0.081
67.72	18	45	24	41	37	3.6	30.9	0.0036	0.092
75.20	20	50	28	46	42	3.8	34.3	0.0038	0.097
90.30	24	60	33	56	50	4.8	41.2	0.0048	0.120
105.35	28	70	39	64	58	5.8	48.1	0.0058	0.147
109.11	29	73	40	62	60	6.0	49.8	0.0060	0.152
116.63	31	81	45	73	66	6.1	53.2	0.0061	0.155
131.68	35	90	48	80	74	6.2	60.1	0.0062	0.157
135.45	36	90	50	82	75	6.8	61.8	0.0068	0.173
146.73	39	100	54	90	81	7.2	67.0	0.0072	0.183
150.50	40	100	56	93	83	7.3	68.7	0.0073	0.185
161.78	43	110	60	100	90	7.4	73.8	0.0074	0.188
165.55	44	110	61	102	92	7.6	75.5	0.0076	0.193
176.83	47	120	65	108	97	8.0	80.7	0.0078	0.198
199.41	53	135	74	122	110	9.0	91.0	0.0085	0.216
203.17	54	137	75	125	113	9.0	92.7	0.0090	0.229
218.22	58	146	80	134	120	9.5	99.6	0.0092	0.234
244.56	65	165	90	150	135	10.0	111.6	0.0095	0.241
252.08	67	170	93	156	140	10.5	115.1	0.0100	0.250
270.90	72	183	100	166	150	11.0	123.7	0.0110	0.289
285.95	76	192	105	175	158	13.0	130.5	0.0130	0.330
308.52	82	208	114	189	170	14.0	140.8	0.0140	0.356
312.00	87	220	120	200	180	15.0	142.4	0.0150	0.380
385.06	105	267	146	244	220	18.0	175.8	0.0175	0.445

Paper Type Specifications

Thin Paper

Thin Paper is paper weighing between 14 lb. to 15.5 lb. bond. It can be fed via any paper tray, except the bypass tray.

Normal (Plain Paper)

The Normal paper is used for copying in general and is called "PPC paper." The normal paper is usually not a recycled paper. Specify [Normal] to the tray to which the normal paper or the recycled paper is loaded for copying.

Recycled Paper

Recycled Paper is identified as recycled paper along with a designation as to the percentage of the paper that is actually made from recycled materials. Generally speaking, these devices will support recycled paper weighing between 16 lb. to 24 lb. bond.

Thick Paper 1

Thick Paper 1 is paper weighing between 24.25 to 32 lb. bond. It can be fed via any paper tray.

Thick Paper 1+

Thick Paper 1+ is paper weighing between 32.25 to 41.75 lb. bond. It can be fed via any paper tray.

Thick Paper 2

Thick Paper 2 is paper weighing between 42 to 55.5 lb. bond. It can be fed via any paper tray.

Thick Paper 3

Thick Paper 3 is paper weighing between 55.75 to 68 lb. bond. It can be fed via any paper tray.

Thick Paper 4

Thick Paper 4 is paper weighing between 68.25 to 79.75 lb. bond. It can be fed via the bypass tray.

Special Paper

A thin or other specialty type paper that falls within the paper weight specification and appears on the Recommended Paper Stock List.

OHP

Specify [OHP] to a tray to which transparent films are loaded. It can be fed only via the bypass tray (20 sheets or less). Black and white printing supported only.

Envelopes

Specify [Envelope] for bypass tray.

Postcards

A Postcard is defined as a rectangular piece of the thick paper or thin cardboard. This product series supports 4" x 6" size postcards. Postcards are fed only via the Bypass Tray.

Tab Dividers

A stiff sheet with divider tabs. Tab Divider sheets can only be fed (long edge only) via the Bypass Tray.

Banner Paper

An 11.75" x 47.25" paper that is fed via the Bypass Tray to create banners.

Konica Minolta bizhub C658/C558/C458

Specification & Installation Guide



KONICA MINOLTA

Recommended Paper Stocks

Plain Paper – Color

Class.	Weight	Brand of Paper	Size
Plain Paper	20 lb. Bond (75 gr)	Domtar Recycled Copy (30% Post Consumer)	8.5" x 11"
Plain Paper	22 lb. Bond (80 gr)	Konica Minolta CF Paper	8.5" X 11"
Plain Paper	22 lb. Bond (80 gr)	Konica Minolta CF Paper	11" X 17"
Plain Paper	22 lb. Bond (80 gr)	Konica Minolta CF Paper	12" X 18"
Plain Paper	24 lb. Bond (89 gr)	SMART Carnival Stellar White	8.5" x 11"
Plain Paper	24 lb. Bond (89 gr)	SMART Carnival White	8.5" x 11"
Plain Paper	24 lb. Bond (90 gr)	SMART Synergy Bond 25% Cotton	8.5" x 11"
Plain Paper	24 lb. Bond (90 gr)	Domtar Microprint Laser	8.5" x 11"
Plain Paper	24 lb. Bond (90 gr)	Mohawk Color Copy 98 Bright White	8.5" x 11"
Thick 1	28 lb. Bond (105 gr)	Konica Minolta CF Paper	8.5" X 11"
Thick 1	28 lb. Bond (105 gr)	Konica Minolta CF Paper	11" X 17"
Thick 1	28 lb. Bond (105 gr)	Konica Minolta CF Paper	12" X 18"
Thick 1	28 lb. Bond (105 gr)	Domtar Microprint Color Copy	8.5" x 11"
Thick 1	32 lb. Bond (120 gr)	Hammermill Color Copy	8.5" X 11"
Thick 1	32 lb. Bond (120 gr)	Hammermill Color Copy Paper – Photo White	8.5" x 11"
Thick 2	60 lb. Cover (163 gr)	Hammermill Color Copy	8.5" X 11"
Thick 3	80 lb. Cover (216 gr)	Hammermill Color Copy	8.5" X 11"
Thick 4	100 lb. Cover (271 gr)	Hammermill Color Copy	8.5" X 11"

Plain Paper – B/W

Plain Paper	20 lb. Bond (75 gr)	Hammermill Tidal MP	8.5" X 11"
-------------	---------------------	---------------------	------------

Single-Sided Glossy

Thick 3	10pt Cover (219 gr)	SMART Kromekote Laser High Gloss Coated One Side 10pt Cover	8.5" x 11"
Thick 3	12pt Cover (247 gr)	SMART Kromekote Laser High Gloss Coated One Side 12pt Cover	8.5" x 11"

Double-Sided Glossy

Thick 1	32 lb. Bond (120 gr)	Mohawk Color Copy Gloss Pure White	8.5" x 11"
Thick 1	80 lb. Text (118 Sappi Opus Gloss gr)		8.5" x 11"
Thick 1	90 lb. Text (133 SMART Kromekote Laser gr)	High Gloss Coated Two Sides*	8.5" x 11"
Thick 3	80 lb. Cover (216 gr)	Mohawk Color Copy Gloss Pure White	8.5" x 11"
Thick 3	80 lb. Cover (216 gr)	Sappi Opus Gloss Cover	8.5" x 11"

Double-Sided Glossy continued

Class.	Weight	Brand of Paper	Size
Thick 3	80 lb. Cover (216 gr)	Domtar Microprint Coated Laser Gloss Cover	8.5" x 11"
Thick 3	10 pt Cover (234 gr)	SMART Kromekote Laser High Gloss Coated Two Sides 10 pt Cover	8.5" x 11"
Thick 3	90 lb. Cover (237 gr)	SMART Kromekote® Plus C2S Cover	8.5" x 11"
Thick 4	100 lb. Cover (270 gr)	Mohawk Color Copy Gloss Pure White 100C	8.5" x 11"

Cover Stock

Thick 2	60 lb. Cover (163 gr)	Domtar Microprint Color Copy Cover	8.5" x 11"
Thick 2	65 lb. Cover (176 gr)	Domtar Microprint Color Copy Cover	8.5" x 11"
Thick 3	80 lb. Cover (216 gr)	Domtar Microprint Coated Laser Matte Cover	8.5" x 11"
Thick 3	80 lb. Cover (216 gr)	Domtar Microprint Color Copy Cover	8.5" x 11"
Thick 3	80 lb. Cover (216 gr)	SMART Carnival White Cover	8.5" x 11"
Thick 3	140 lb. Index (255 gr)	Wausau Exact Index	8.5" x 11"
Thick 3	80 lb. Cover (216 gr)	Mohawk Color Copy 98 Bright White	8.5" x 11"
Thick 4	100 lb. Cover (270 gr)	Mohawk Color Copy 98 Bright White	8.5" x 11"

Labels

Avery Dennison 5889 Postcard	8.5" x 11"
Avery Dennison 6870 (30 labels per sheet)	8.5" x 11"
Avery Dennison 6873 (8 labels per sheet)	8.5" x 11"
Avery Dennison 6876 (2 labels per sheet)	8.5" x 11"
Avery 6878 4-UP labels for Color Laser	8.5" x 11"

Envelopes

Envelopes 24 lb.	Preservation Wove 5789 #6 3/4	3.85" x 6.5" (98x165 mm)
------------------	-------------------------------	--------------------------

Tab Dividers

Avery Dennison 20406 (long edge only)	8.5" x 11"
---------------------------------------	------------

Specialty Paper

Thick 2	—	TECHNI-Print 9721PO* T-shirt Transfer Paper**	8.5" x 11"
---------	---	---	------------

Transparency

OHP sheets	—	3M-PP2500	8.5" x 11"
------------	---	-----------	------------

Banner Paper

Banner Mode/Thick 1	100 lb. Text (180 gr)	Konica Minolta Banner Paper	11.75" x 47.25"
---------------------	-----------------------	-----------------------------	-----------------

* Paper cannot be used in a high humidity environment.

**T-Shirt Transfer Paper: The C658/C558/C458 Series should not be used solely for T-shirt transfer applications. T-Shirt transfer paper should be used on a limited basis, not to exceed a 250-sheet per run maximum. If a misfeed should occur, clear it immediately (due to the odor) and then run 15-25 sheets of regular plain paper (20 lb.) through the device to clean the fusing rollers. T-Shirt Transfer paper cannot be used in high humidity environments.

How to Build a System for the bizhub C658/C558/C458 Digital Printer/Copier/Scanner/Fax (from start to finish)

Step 1: Base Unit

- **C658/C558/C458 Digital Color Printer/Copier/Scanner**
Includes PS, PCL & XPS Controller, 4 GB Standard Memory, Dual Scan Document Feeder, Duplex Unit, 250 GB HDD, Web Browser, USB Interfaces for Scan-to-USB Thumb Drive/Print-from-USB Thumb Drive, USB Local Printing, Optional Authentication Device Connection, Service USB Firmware Updates, CMYK Developer Units, Color Drum Units and Black Drum Unit

Step 2: Document Handling


- **Single Pass Dual Scan Document Feeder**
(Standard/Pre-installation)
- **UK-501 Multi-Feed Detection Kit**
- **Paper Supply/Cabinet Options** (Required)
Select one of the following:
 - **PC-415 Large Capacity Cassette** (2,500 sheets - Letter crosswise only)
 - **PC-215 2-way Paper Feed Cassette** (Two 500-sheet Universal Cassettes)
 - **PC-115 Paper Feed Cassette** (One 500-sheet Universal Cassette; Includes 1 storage drawer)
 - **DK-510 Copy Desk** (Storage Drawer Only)
 - **LU-207 Large Capacity Unit** (Not required) (2,500 sheets accommodating 8.5" x 11", 8.5" x 14", 11" x 17", 12" x 18" or SRA3)
 - **LU-302 Large Capacity Unit** (Not required) (3,000 sheets/letter only)

Step 4: Output Options

Must select one of the following:

- **FS-537 Staple Finisher** (100 sheets)
- **JS-602 Job Separator Tray** (for FS-537)
- **PI-507 Post Inserter** (for FS-537)
- **PK-523 Punch Kit** (for FS-537)
- **ZU-609 Z-Fold Unit** (for FS-537)
- **FS-537SD Staple Finisher** (100 Sheets) + **Saddle Stitcher Kit**
- **FS-536 Floor Finisher** (50-sheet stapling)
- **PK-520 Punch Kit** (for FS-536)
- **RU-513 Relay Unit** (Required to install FS-536)
- **FS-536SD Staple Finisher** (50 sheets) + **Saddle Stitcher Kit**
- **RU-513 Relay Unit** (Required to install FS-536/FS-536SD/FS-537/FS-537SD)
- **FS-533 Inner Finisher** (50-sheet stapling) (C558/C458 Only)
- **PK-519 Punch Kit** (for FS-533)
- **JS-506 Job Separator Tray**
- **OT-506 Output Tray** (Required if a finisher is not attached)

continued

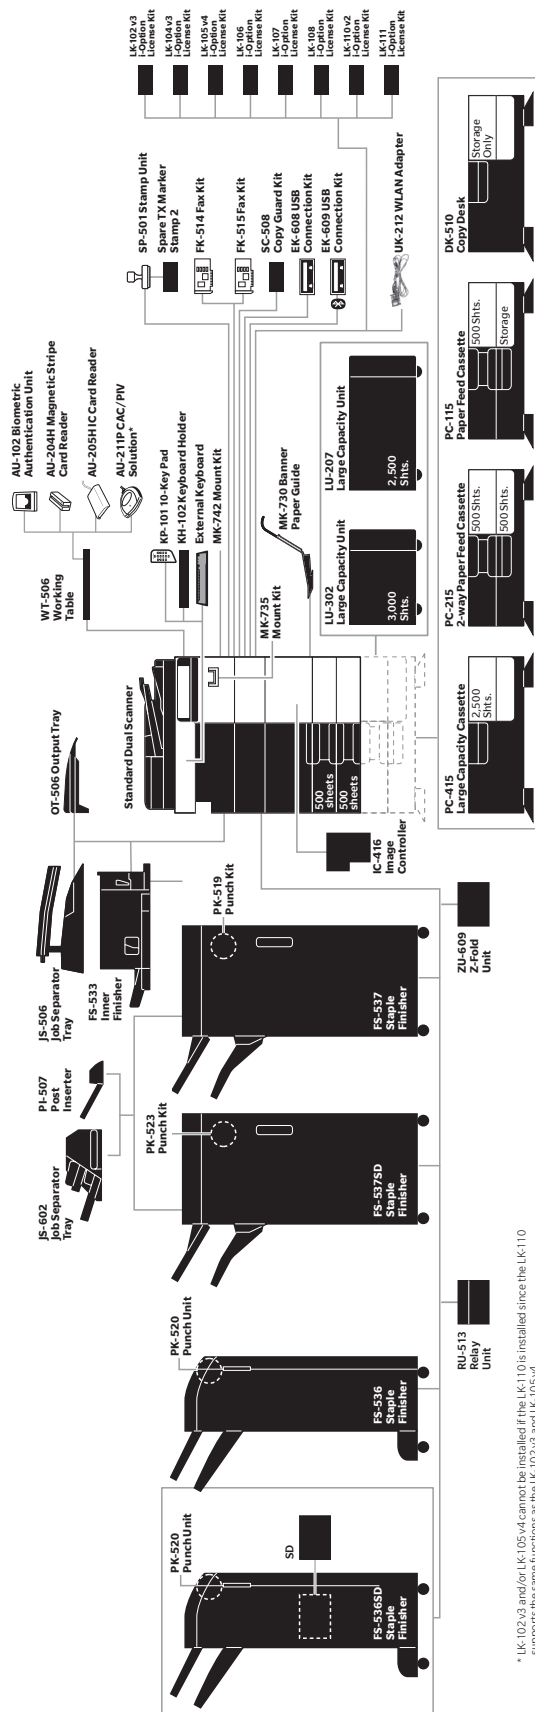

* LK-102, 3, and 4, and LK-105, V cannot be installed if the LK-110 is installed since the LK-110 supports the same functions as the LK-102, 3, and LK-105, 4.




How to Build a System for the bizhub C658/C558/C458 Digital Printer/Copier/Scanner/Fax (from start to finish)

- **External Keyboard** (Requires KH-102)
 - KH-102 Keyboard Holder
- **LK-102 v3 i-Option License Kit*** (Enhanced PDF Encryption, PDF/A (1a/1b) and Linearized PDF support)
- **LK-104 v3 i-Option License Kit** (Voice Guidance; Requires UK-204)
- **LK-105 v4 i-Option License Kit*** (Searchable PDF)
- **LK-106 i-Option License Kit** (Bar Code Font Printing)
- **LK-107 i-Option License Kit** (Unicode Font Printing)
- **LK-108 i-Option License Kit** (OCR Font Printing)
- **LK-110 v2 i-Option License Kit*** (OOXML file conversion, Enhanced Image Data, Combines LK-102 & LK-105 functionality)
- **LK-111 i-Option License Kit** (ThinPrint Client Support)
- **MK-730 Banner Paper Guide**
- **MK-735 Mount Kit** (for AU-205H)
- **SC-508 Copy Guard Kit** (Copy Guard/Password Copy Protection; 2 Kits required per device)
- **UK-212 WLAN Adapter**
- **WT-506 Working Table**

- **External Keyboard** (Requires KH-102)
 - KH-102 Keyboard Holder
- **LK-102 v3 i-Option License Kit*** (Enhanced PDF Encryption, PDF/A (1a/1b) and Linearized PDF support)
- **LK-104 v3 i-Option License Kit** (Voice Guidance; Requires UK-204)
- **LK-105 v4 i-Option License Kit*** (Searchable PDF)
- **LK-106 i-Option License Kit** (Bar Code Font Printing)
- **LK-107 i-Option License Kit** (Unicode Font Printing)
- **LK-108 i-Option License Kit** (OCR Font Printing)
- **LK-110 v2 i-Option License Kit*** (OOXML file conversion, Enhanced Image Data, Combines LK-102 & LK-105 functionality)
- **LK-111 i-Option License Kit** (ThinPrint Client Support)
- **MK-730 Banner Paper Guide**
- **MK-735 Mount Kit** (for AU-205H)
- **SC-508 Copy Guard Kit** (Copy Guard/Password Copy Protection; 2 Kits required per device)
- **UK-212 WLAN Adapter**
- **WT-506 Working Table**

- **External Keyboard** (Requires KH-102)
 - KH-102 Keyboard Holder
- **LK-102 v3 i-Option License Kit*** (Enhanced PDF Encryption, PDF/A (1a/1b) and Linearized PDF support)
- **LK-104 v3 i-Option License Kit** (Voice Guidance; Requires UK-204)
- **LK-105 v4 i-Option License Kit*** (Searchable PDF)
- **LK-106 i-Option License Kit** (Bar Code Font Printing)
- **LK-107 i-Option License Kit** (Unicode Font Printing)
- **LK-108 i-Option License Kit** (OCR Font Printing)
- **LK-110 v2 i-Option License Kit*** (OOXML file conversion, Enhanced Image Data, Combines LK-102 & LK-105 functionality)
- **LK-111 i-Option License Kit** (ThinPrint Client Support)
- **MK-730 Banner Paper Guide**
- **MK-735 Mount Kit** (for AU-205H)
- **SC-508 Copy Guard Kit** (Copy Guard/Password Copy Protection; 2 Kits required per device)
- **UK-212 WLAN Adapter**
- **WT-506 Working Table**

- **External Keyboard** (Requires KH-102)
 - KH-102 Keyboard Holder
- **LK-102 v3 i-Option License Kit*** (Enhanced PDF Encryption, PDF/A (1a/1b) and Linearized PDF support)
- **LK-104 v3 i-Option License Kit** (Voice Guidance; Requires UK-204)
- **LK-105 v4 i-Option License Kit*** (Searchable PDF)
- **LK-106 i-Option License Kit** (Bar Code Font Printing)
- **LK-107 i-Option License Kit** (Unicode Font Printing)
- **LK-108 i-Option License Kit** (OCR Font Printing)
- **LK-110 v2 i-Option License Kit*** (OOXML file conversion, Enhanced Image Data, Combines LK-102 & LK-105 functionality)
- **LK-111 i-Option License Kit** (ThinPrint Client Support)
- **MK-730 Banner Paper Guide**
- **MK-735 Mount Kit** (for AU-205H)
- **SC-508 Copy Guard Kit** (Copy Guard/Password Copy Protection; 2 Kits required per device)
- **UK-212 WLAN Adapter**
- **WT-506 Working Table**

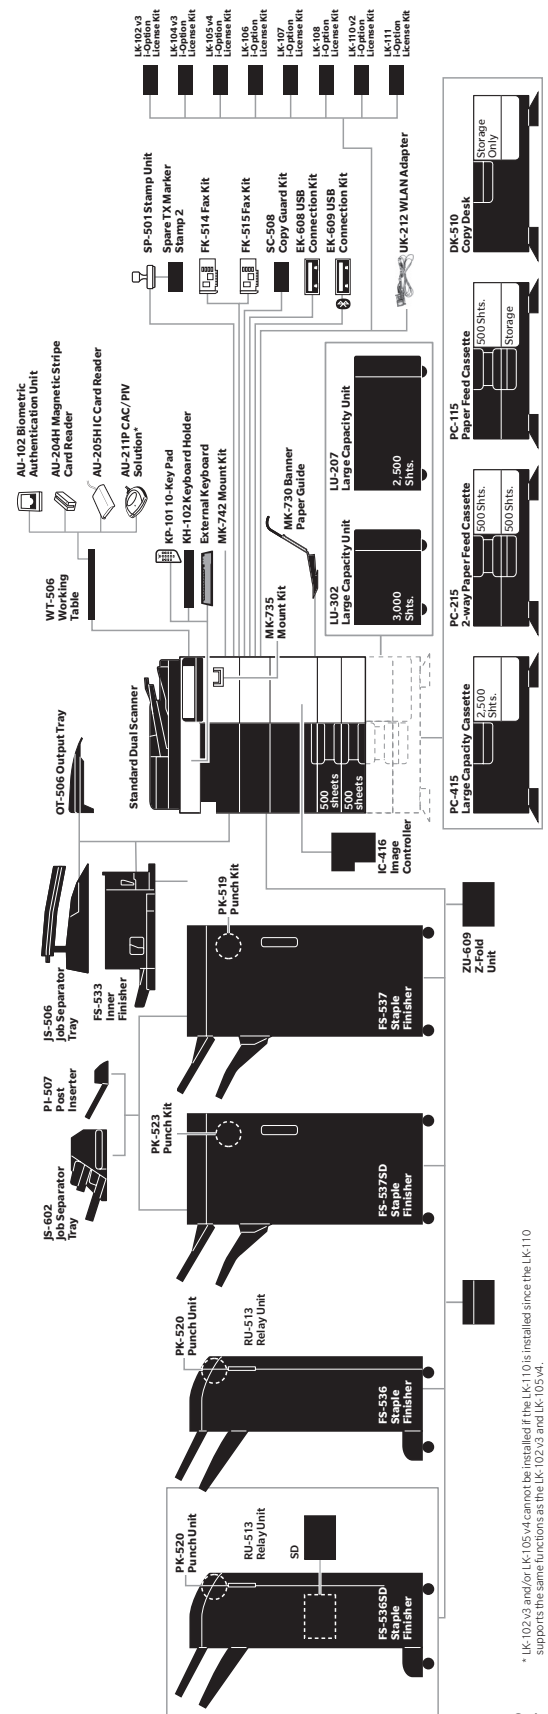

* LK-102 v3 and/or LK-105 v4 cannot be installed if the LK-110 is installed since the LK-110 supports the same functions as the LK-102 v3 and LK-105 v4.

Konica Minolta bizhub C658/C558/C458

Specification & Installation Guide



Accessory Options for bizhub C658/C558/C458 Digital Color Printer/Copier/Scanner/Fax

ACCESSORIES	ITEM NO.	DESCRIPTION	NOTES
BASE UNIT			
C658	A79J011	C658 Color Printer/Copier/Scanner	Includes PS, PCL & XPS Controller, 4 GB Standard Memory, Dual Scan Document Feeder, Duplex Unit, 250 GB HDD, Web Browser, USB Interfaces for Scan-to-USB Thumb Drive/Print-from-USB Thumb Drive, USB Local Printing, Optional Authentication Device Connection, Service USB Firmware Updates, CMYK Developer Units, Color Drum Units and Black Drum Unit.
C558	A79K011	C558 Color Printer/Copier/Scanner	Includes PS, PCL & XPS Controller, 4 GB Standard Memory, Dual Scan Document Feeder, Duplex Unit, 250 GB HDD, Web Browser, USB Interfaces for Scan-to-USB Thumb Drive/Print-from-USB Thumb Drive, USB Local Printing, Optional Authentication Device Connection, Service USB Firmware Updates, CMYK Developer Units, Color Drum Units and Black Drum Unit.
C458	A79M011	C458 Color Printer/Copier/Scanner	Includes PS, PCL & XPS Controller, 4 GB Standard Memory, Dual Scan Document Feeder, Duplex Unit, 250 GB HDD, Web Browser, USB Interfaces for Scan-to-USB Thumb Drive/Print-from-USB Thumb Drive, USB Local Printing, Optional Authentication Device Connection, Service USB Firmware Updates, CMYK Developer Units, Color Drum Units and Black Drum Unit.
DOCUMENT HANDLING			
	Standard	Dual Scan Document Feeder	Standard; Pre-installed, single-pass, simultaneous duplex scanner
PAPER SUPPLY/CABINET OPTIONS			
DK-510	7640018680	Copy Desk	Storage Drawer only.
LU-207	A9EFW11	Large Capacity Unit (2,500 sheets)	Large Capacity Cassette housing 8.5" x 11" P/L, 8.5" x 14", 11" x 17", 12" x 18" or SRA3 (service adjustable); brings maximum paper supply to 6,150 sheets.
LU-302	A87VW11	Large Capacity Unit (3,000 letter sheets)	Large Capacity Cassette housing 8.5" x 11" P paper
PC-115	A9HFWY1	Paper Feed Cabinet	One 500-sheet Universal Paper Cassette and Storage Drawer.
PC-215	A9HFWY2	2-way Paper Feed Cabinet	Two 500-sheet Universal Paper Cassettes.
PC-415	A9HF013	Large Capacity Cassette	2,500 sheets; Letter-Size (Portrait) Paper only.
OUTPUT OPTIONS (Select one of the following)			
FS-533	A2YUWY2	Inner Finisher	50-sheet Inner Staple Finisher required to support PK-519 Punch Kit. Supports banner printing. Compatible with bizhub C558 and C458.
FS-536	A87GWY1	Floor Finisher	50-sheet staple finisher required to support PK-520 Punch Kit. Supports banner printing. RU-513 required.
FS-536SD	A87GWYA	Staple Finisher (50 sheets) + SD-511 Saddle Sticher	50-sheet staple finisher equipped with SD-511 Saddle Sticher that provides center-stapled and folded booklets (up to 20-page booklets), half-fold and tri-fold (for letter-size paper only); Supports banner paper.
RU-513	A87JWY2	Relay Unit for FS-536 or FS-537	Required to install FS-536, FS-536SD, FS-537 or FS-537SD on bizhub C658/C558/C458.
FS-537	A87HWY1	Staple Finisher (100 sheets)	100-sheet staple finisher; required to support optional JS-602 Job Separator Tray, optional PK-523 Punch Kit, optional PI-507 Post Inserter and optional ZU-609 Z-Fold Unit; Supports banner printing. Please note JS-602 and PI-507 cannot both be installed on an FS-537. RU-513 required.
FS-537SD	A87HWYA	Staple Finisher (100 sheets) + Saddle Sticher Kit	100-sheet staple finisher equipped with saddle sticher that provides center-stapled and folded booklets (up to 20-page booklets), half-fold and tri-fold (for letter-size paper only); supports banner printing. RU-513 required.
JS-506	A2YVWY1	Job Separator Tray	Separates print, copy and fax jobs; can be installed if finisher is not attached; supports banner printing. (Available only for the C558/C458).
JS-602	A10CWY1	Job Separator Tray	Adds 3rd tray to FS-537 to enable separating print, copy and fax output; Cannot be installed if PI-507 Post Inserter is attached.
OT-506	A4MDWY1	Output tray	Exit Tray; installed if a finisher is not attached.
PI-507	ABC6WY1	Post Inserter	For cover insert sheets and manual finishing for FS-537; Cannot be installed if JS-602 Job Separator Tray is installed.
PK-519	A3EUW12	2-/3-Hole Punch Kit	2-/3-Hole Punch Kit for FS-533 Inner Finisher.
PK-520	A3ETW11	2-/3-Hole Punch Kit	2-/3-Hole Punch Kit for FS-536.
PK-523	A99KW11	2-/3-Hole Punch Kit	2-/3-Hole Punch Kit for FS-537
ZU-609	A63GWY1	Z-Fold Unit	Adds Z-Fold and Hole Punch functionality to FS-537 OR FS-537SD.

Konica Minolta bizhub C658/C558/C458

Specification & Installation Guide



Accessory Options for bizhub C658/C558/C458 Digital Color Printer/Copier/Scanner/Fax

ACCESSORIES	ITEM NO.	DESCRIPTION	NOTES
ANALOG FAX OPTIONS			
FK-514	A883011	Fax Kit for Lines 1 & 2	Supports single line fax capabilities; Add second FK-514 Fax Kit for dual line fax capabilities.
FK-515	A884W1	Fax Kit for Lines 3 & 4	Supports third and fourth fax line capabilities; Must have two (2) FK-514 Fax Kits for 1st and 2nd Fax Lines; Add one FK-515 for Line 3 and a second FK-515 for line 4. One MK-742 Mount Kit required.
MK-742	A886WY1	FK-515 Fax Mount Kit	Mount Kit required to add FK-515 Fax Kit(s) for Line 3 and Line 4 fax support. Only one MK-742 Mount Kit required.
SP-501	4614506	Stamp Unit	Stamp Unit
Spare Fax Stamp	4614511	Spare TX Marker Stamp 2	Spare marker to replenish SP-501 Stamp Unit.
CONTROLLER OPTIONS			
IC-416	A8CTWY1	Fiery Image Controller	Equipped with 160 GB HDD. Requires Fiery Controller Interface Kit VI-510; Compatible with bizhub C658, C558, C458, C368, C308, C258.
VI-510	A9DNWY1	Fiery Controller Interface	Interface Kit for IC-416 Fiery Image Controller. Compatible only with C658, C558 and C458.
ADDITIONAL OPTIONS			
AU-102	A0X9WY1	Biometric Authentication Unit	Scans finger vein patterns to enable users to gain access to the device. Requires WT-506 Working Table.
AU-204H**	7640013468	Magnetic Stripe Card Reader	Allows authorized access to the MFP using magnetic stripe cards. WT-506 Working Table.
AU-205H	R54270001366466	IC Card Reader	Allows authorized access to the MFP using a wide variety of iClass card formats. Can be mounted internally using optional MK-735 Mount Kit or externally on optional WT-506 Working Table.
AU-211P	—	CAC/PIV Solution with Certificate	Requires WT-506 Working Table. Contact your local Government Account Manager for information.
EK-608	A88AWY2	Local USB Interface Kit	Required to connect optional external keyboard and supports Voice Guidance functions available with optional LK-104 v3.
EK-609	A87DWY2	Local USB Interface Kit	Required to connect optional external keyboard, provides Bluetooth printing support for mobile phone link and supports Voice Guidance functions available with optional LK-104 v3.
LK-102 v3*	A0PD116	i-Option License Kit	Enables 128-bit AES PDF encryption; PDF File and password are encrypted; provides PDF/A (1a/1b) and Linearized PDF file format support.
LK-104 v3	A0PD117	i-Option License Kit	Provides Voice Guidance functions. EK-608 or EK-609 USB Interface Kit and KP-101 10-Key Pad (if customer wants to access Voice Guidance from the hard 10-Key Pad). If KP-101 is not purchased, Voice Guidance function can be programmed and accessed via a Registration Key.
LK-105 v4*	A0PD118	i-Option License Kit	Provides Searchable PDF functionality. Requires UK-204 i-Option Memory Upgrade. Please note that the LK-110 supports the same functions as the LK-105 v4, therefore, both license kits cannot be installed on the same device.
LK-106	A0PD119	i-Option License Kit	Provides Bar Code Font printing support.
LK-107	A0PD11F	i-Option License Kit	Provides Unicode Font printing support.
LK-108	A0PD11G	i-Option License Kit	Provides OCR Font printing support.
LK-110 v2	A0PD11J	i-Option License Kit	Provides DOCX, XLSX format file conversion, Fax to searchable PDF, convert print data in box to compact PDF, combines LK-102 (encrypted PDF) & LK-105 (searchable PDF/OCR) functionality. Please note that if you install the LK-110 on a device, you cannot install the LK-102 v3 and/or LK-105 v4 on the same device.
LK-111	A0PD11K	i-Option License Kit	Provides ThinPrint client support.
MK-730	A4MEWY2	Banner Paper Guide	Enables automatic feeding of banner paper. Up to 10 banner sheets supported.
MK-735	A4NMWY1	Mount Kit	Internal Mount Kit for AU-205H. Required if card reader is not mounted externally using the WT-506.
External Keyboard	7640006869	External Keyboard	Computer type keyboard for alphanumeric data entry (alternative to the standard QWERTY keyboard available on the MFP's LCD). Requires either EK-608 or EK-609 and KH-102.
KH-102	A4NRWY3	Keyboard Holder	Holds the optional QWERTY keyboard in place on the MFP.
KP-101	A64TWY3	10-Key Pad	Optional 10 Key Pad. Supports Voice Guidance function available with optional LK-104 v3 i-Option License Kit. Affixes to the right-hand side of the control panel.

continued

* LK-102 v3 and/or LK-105 v3 cannot be installed if the LK-110 is installed since the LK-110 supports the same functions as the LK-102 v3 and LK-105 v3.
 ** May not be available at time of launch.

Konica Minolta bizhub C658/C558/C458

Specification & Installation Guide



Accessory Options for bizhub C658/C558/C458 Digital Color Printer/Copier/Scanner/Fax

ACCESSORIES	ITEM NO.	DESCRIPTION	NOTES
ADDITIONAL OPTIONS continued			
SC-508	A4MMWY3	Copy Guard Kit (Copy Guard/Password Copy Protection)	Detects documents with Copy Protect patterns applied. Gives users the option to prevent copying sensitive documents or allows copying when password is entered. Dual Scan models require two SC-508 Security Kits.
UK-212	A87EWY4	Wireless LAN Upgrade Kit	Provides wireless secure connection for printing, scanning and Authentication.
WT-506	A0W4WY3	Working Table	Required for AU-102 Biometric Unit, AU-211P CAC/PIV Solution. Required for AU-201H and AU-202H HID iClass Card Authentication Unit if these card readers are not mounted internally using the MK-735.

CONSUMABLE YIELDS*

CONSUMABLE	ITEM NO.	YIELD
DV512K Developing Unit – Black	A9C803D	600,000
DV512C Developing Unit – Cyan	A9C80KD	600,000
DV512M Developing Unit – Magenta	A9C80ED	600,000
DV512Y Developing Unit – Yellow	A9C808D	600,000
DR512 Color Drum Unit	A7U40TD	(C658) 135,000 (C558) 130,000 (C458) 125,000
DR313K Black Drum Unit	A7U40RD	(C658) 155,000 (C558/C458) 145,000
TN514K Toner – Black	A9E8130	27,000
TN514C Toner – Cyan	A9E8430	26,000
TN514M Toner – Magenta	A9E8330	26,000
TN514Y Toner – Yellow	A9E8230	26,000
Waste Toner Box (WX103)	A4NNWY3	40,000
C658 Fusing Unit	A79JR71000	1,175,000
C558 Fusing Unit	A79JR71000	1,175,000
C458 Fusing Unit	A79MR70200	600,000
Intermediate Image Transfer Kit	A161R71300	300,000
Staples SK-602 (For FS-536, FS-536SD and FS-533)	14YK	5,000 x 3 pkg/case
Staples MS-10A (For FS-537 and FS-537SD)	4599141	5,000 x 3 pkg/case

* Based on 20% total coverage.